

For Commercial, Institutional and Industrial Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

Series 223, 223S

Super Capacity Water Pressure Reducing Valves*

Sizes: 1/2" – 2 1/2" (15 – 65mm)

Series 223 and 223S Super Capacity Water Pressure Reducing Valves are designed to reduce incoming water pressure to a sensible level to protect plumbing system components and reduce water consumption. This series is suitable for water supply pressures up to 300psi (20.7 bar) and may be adjusted from 25 – 75psi (172 – 517 kPa). The standard setting is 50psi (345 kPa). Series 223 features an enlarged diaphragm, spring cage and seat orifice for super capacity performance. Series 223S has the same options as the 223, except it is furnished with a strainer. All parts are quickly and easily serviceable without removing the valve from the line. The optional bypass feature permits the flow of water back through the valve into the main when pressures, due to thermal expansion on the outlet side of the valve, exceed the pressure in the main.

Features

- Enlarged diaphragm, spring cage and seat orifice for super capacity performance
- Bronze body construction (except 2 1/2" (65mm) which is iron)
- Serviceable in line
- Series 223S furnished with separate strainer
- Optional bypass feature controls thermal expansion pressure**
- Sealed spring cage on all models for accessible outdoor or pit installations.

Models

223 NPT threaded female inlet x NPT threaded female outlet



223-S NPT threaded female inlet x NPT threaded female outlet with strainer

For 2 1/2" – 3" (65 – 80mm) bronze threaded valves, refer to literature ES-N223B.

For 3" (80mm) flanged connections, refer to literature ES-N223F.

Specifications

A Water Pressure Reducing Valve shall be installed on the water service pipe near its entrance to the building where supply main pressure exceeds 60psi (413 kPa) to reduce it to 50psi (345 kPa) or lower. Sill cocks and outside wall hydrants may be left on full main pressure at the option of the owner. Provision shall be made to permit the bypass flow of water around the valve back into the main when pressures, due to thermal expansion on the outlet side of the valve, exceed the pressure in the main. Pressure reducing valves with built-in bypass check valves and strainer will be acceptable. Approved valves shall comply with ASSE 1003. Valve shall be a Watts Regulator Company Series 223 or 223S (with strainer).

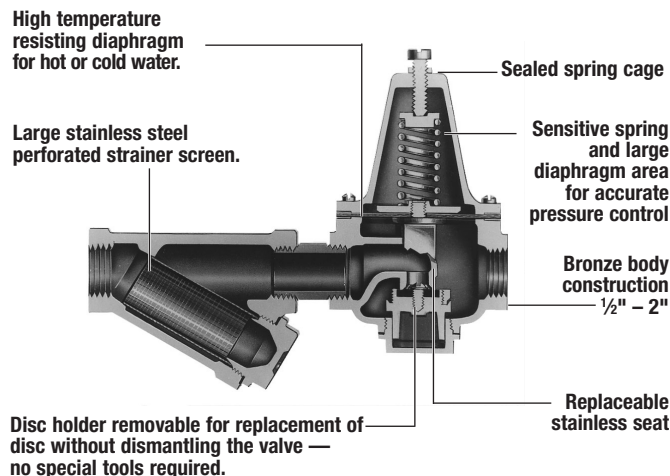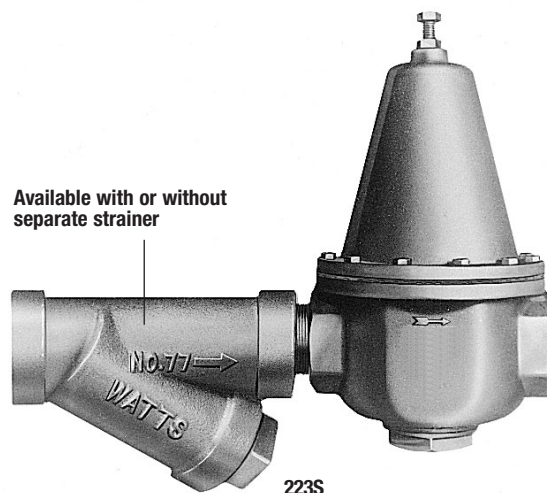

IMPORTANT: INQUIRE WITH GOVERNING AUTHORITIES FOR LOCAL INSTALLATION REQUIREMENTS

*A water saving test program concluded that reducing the supply pressure from 80-50psi (551-345 kPa) resulted in a water savings of 30%.

**Bypass will not work if inlet pressure is above 150psi (10.3 bar).

Materials

Body: 1/2" – 2" (15 – 50mm) Bronze
2 1/2" (65mm) Iron

Seat: Replaceable stainless steel

Strainer Screen: Stainless steel (model 223S)

Diaphragm: Reinforced Buna-N

Valve Disc: EPDM

Pressure – Temperature

Temperature Range: 33°F – 160°F (0.5°C – 71°C)

Maximum Working Pressure: 300psi (20.7 bar)

Adjustable Reduced Pressure Range: 25-75psi (172 – 517 kPa)

Standard Reduced Pressure Setting: 50psi (345 kPa)

Standards



1/2" – 2" (15 – 50mm) meets requirements of ASSE Standard 1003; (ANSI A112.26); CSA Standard B356; Southern Standard Plumbing Code, Military Standard MIL-V-18146B and listed by IAPMO.

Options




B Built-in bypass feature

LP Low pressure range 10-35psi (69 – 241 kPa)

HP High pressure range, reduced range shown below:

REDUCED PRESSURE RANGE - SUFFIX HP			
Size		Range	
in.	mm	psi	bar
1/2	15	50-145	3.4-10.0
3/4	20	50-145	3.4-10.0
1	25	50-145	3.4-10.0
1 1/4	32	50-120	3.4-8.3
1 1/2	40	50-95	3.4-6.6
2	50	50-95	3.4-6.6
2 1/2	65	50-95	3.4-6.6

Capacity

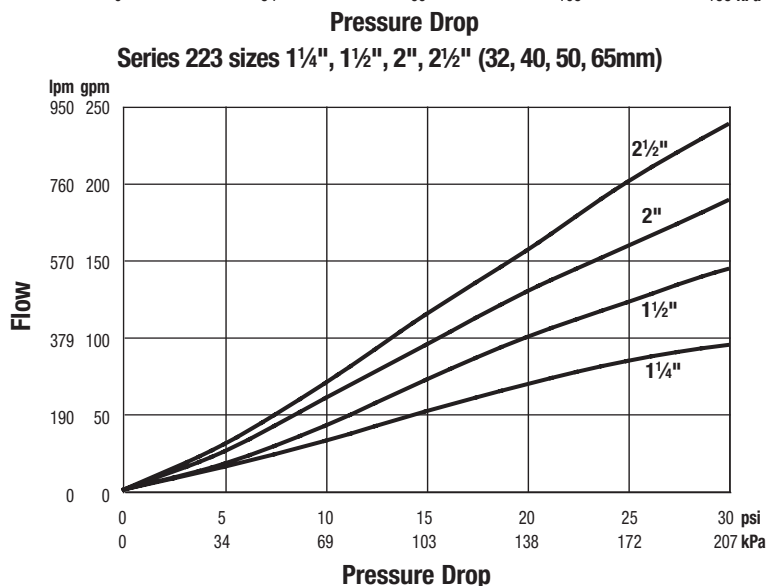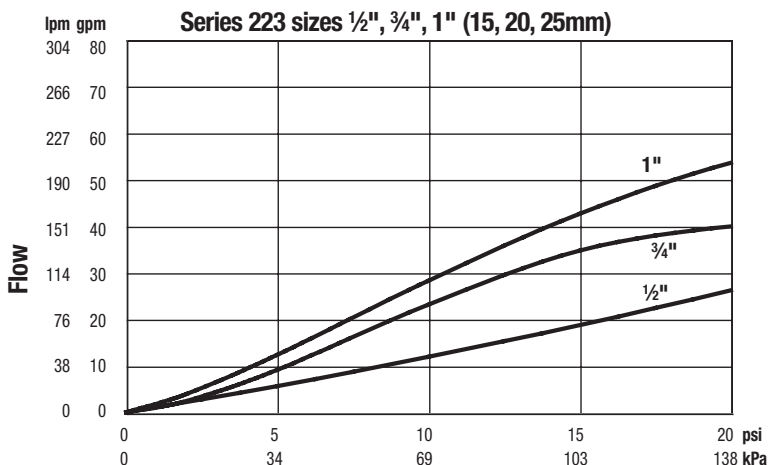

Dimensions — Weights

SIZE (DN)				DIMENSIONS								WEIGHT			
		A (223)		As (223S)		C		D		N (223S)		223		223S	
<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs.</i>	<i>lbs.</i>	<i>kgs.</i>
½	15	4¼	108	9	229	6¼	159	2	50	2½	64	4.5	2.0	6	2.7
¾	20	4¼	108	9	229	6¼	159	2	50	2½	64	5	2.3	6.5	2.9
1	25	4¾	121	10 ¹⁵ / ₁₆	262	6½	165	2 ¹ / ₈	54	2 ¹⁵ / ₁₆	75	7	3.2	9.5	4.3
1¼	32	5	127	11 ¹⁵ / ₁₆	287	6¾	172	2¾	70	3	76	9	4.1	12	5.4
1½	40	6¾	171	14¾	375	9 ⁷ / ₈	251	2¾	70	3 ⁷ / ₁₆	87	19.5	8.8	23.5	10.7
2	50	8	203	16¾	425	10¾	273	3 ³ / ₈	86	4	102	30	13.6	37.5	17.0
2½	65	9	229	20 ¹ / ₈	511	10¾	273	3 ³ / ₈	86	5	127	32.5	14.8	59	26.8

WATTS®

Water Safety & Flow Control Products



ISO 9001-2000
CERTIFIED

USA: 815 Chestnut St., No. Andover, MA 01845-6098; www.watts.com

Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscanada.ca