

Innovative Spray sprinklers for commercial and residential turf and groundcover applications

Nozzles

- Completely compatible with all industry-standard female thread nozzles
- LX Series MPR plastic
- LX Adjustable Arc nozzles
- 5500 Series MPR brass nozzles

*Nozzles not included

Operating Data

Pressure range: 15 to 70 psi (1,0 to 4,8 bars)
Flow-by: Zero at 8 psi (0,6 bars) or greater
Factory installed check valve: 9.5'ft./hd. at 18 psi (2.9m/hd at 1.2bar) minimum for pop-up.

Quick Installation

- T-Plug™ Flush Cap on every head
- Side and bottom inlets on LX6 and LX12*
- Ratchet nozzle alignment

*Side inlet installation on LX6 and LX12 is not recommended in freezing climates.

Construction

- Pressure-activated wiper seal
- Easy grip threaded cover
- Stainless steel retract spring
- High-strength rib design on body

Application

- The LX Series check valves are used with the LX4, LX6, and LX12 spray heads.

Five year warranty



LXS Shrub Adapter

- 1/2 inch (15/21) female inlet threads
- Durable plastic construction
- Top threads accept LX MPR Series, 5500 Series and all industry standard female thread nozzles
- Accepts LX nozzle protective screen (shipped with nozzle)

LX Model Specification

| Model | Pop-up height |
|----------------|---------------|
| LX3 | 3 in (7,6 cm) |
| LX4 | 4 in (10 cm) |
| LX6 | 6 in (15 cm) |
| LX12 | 12 in (30 cm) |
| LX4-CV* | 4 in (10 cm) |
| LX6-CV* | 6 in (15 cm) |
| LX12-CV* | 12 in (30 cm) |
| LX-CV** | |
| LX-NP Cover*** | |


Dimensions

| 1/2 inch (15/21) female threaded inlets | |
|---|---------------------|
| Model | Body Height |
| LX3 | 5 1/4 in (13,3 cm) |
| LX4 | 6 1/4 in (15,9 cm) |
| LX6 | 8 1/2 in (21,6 cm) |
| LX12 | 15 1/4 in (38,7 cm) |
| Exposed Cover | 2 1/4 in (5,7 cm) |

*Factory installed check valve version.

**Field installed check valve version.

***LX non-potable cover

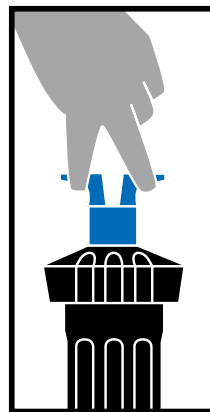

LX Check Valve



LX Non-Potable Cover



LX 3



LX 4



LX 6



LX 12