



Model 860 & 860FT
Resilient Seated Ball Type Test Cocks



Model 860



Model 860FT

FEATURES

Sizes: 1/8" 1/4"

Maximum pressure
Maximum temperature
End connections

Flare connection (860FT)

300 PSI WOG
180°F
Threaded ANSI
B1.20.1
45° Flare SAE



APPLICATION

Designed for installation on backflow preventers as a test port for attaching a differential pressure gauge. Optional SAE flare fitting allows for fast and easy attachment of test kit hoses. A tethered dust cover is included with the 860FT to protect against fouling caused by insects, dirt and debris.

MATERIALS

Main valve body	Cast Bronze ASTM B 584
Ball	Brass ASTM B 16, Chrome Plated
Seat & packing	Teflon
Flare fitting	Brass ASTM B 16

TYPICAL INSTALLATION

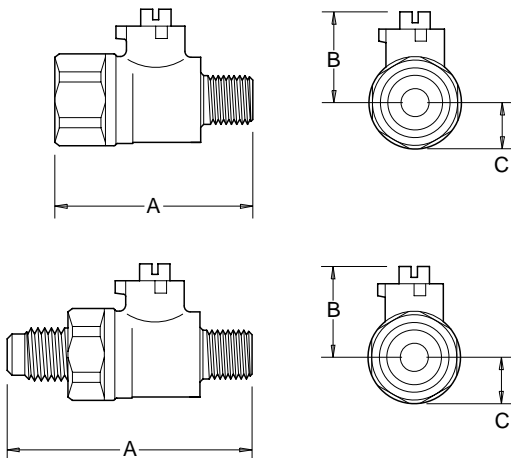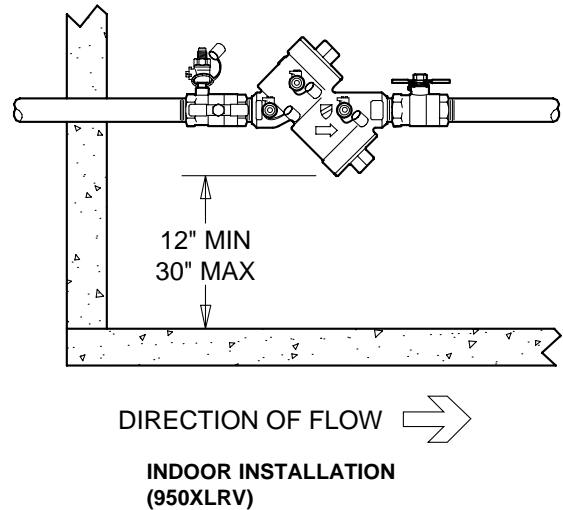

DIMENSIONS & WEIGHTS (do not include pkg.)

MODEL	SIZE	DIMENSIONS inches (approximate)			WEIGHT lbs.
		A	B	C	
18-860	1/8" MNPT X 1/4" FNPT	1 5/8	3/4	3/8	1
14-860	1/4" MNPT X 1/4" FNPT	1 5/8	3/4	3/8	1
18-860FT	1/8" MNPT X 45° SAE	2	3/4	3/8	1
14-860FT	1/4" MNPT X 45° SAE	2	3/4	3/8	1

DOCUMENT NO. BV-860	REV. 10/99
------------------------	---------------