

WILO Circo Star Submittal



Job : _____

Engineer : _____


Contractor : _____

Submitted by : _____ Date: _____

Approved by : _____ Date: _____



Tag #	Model #	Flow gpm / lps	Head feet / meters	Volt	Phase	Comments

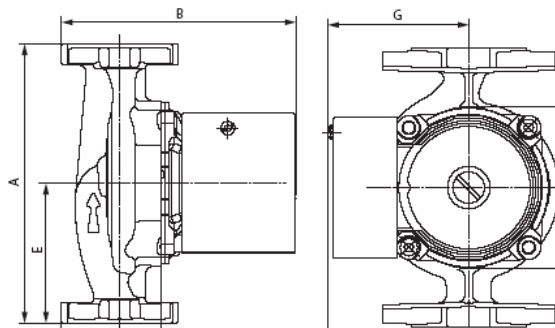

Material of Construction
 Impeller Plastics - (PP-40% GF)
 Shaft Stainless Steel (X40 Cr13)
 Bearing Metal Impregnated Carbon

Maximum Temperature
 Bronze Body: 150degF (66degC)
 Maximum Ambient Temperature 104degF (40degC)
 Maximum Working Pressure 145 psi

TYPE	A	B	E	G	AMPS	WT (lbs)
Star 32 BF	6-3/8" (162 mm)	5-3/8" (136 mm)	3-3/16" (81 mm)	3-3/16" (81 mm)	0.99	6.7
Star 5 BFX	6-3/8" (162 mm)	5-15/16" (150 mm)	3-3/16" (81 mm)	3-3/16" (81 mm)	0.46	7.2
Star 16 BFX	6-3/8" (162 mm)	5-15/16" (150 mm)	3-3/16" (81 mm)	3-3/16" (81 mm)	0.70	7.2
Star 21 BFX	6-3/8" (162 mm)	5-15/16" (150 mm)	3-3/16" (81 mm)	3-3/16" (81 mm)	0.95	7.1
Star 3 BS 5	5" (127 mm)	4-15/16" (125 mm)	2-1/2" (64 mm)	3-3/16" (81 mm)	0.46	6.5
Star 3 BS 7	5" (127 mm)	4-15/16" (125 mm)	2-1/2" (64 mm)	3-3/16" (81 mm)	0.46	5.3
Star 8 BS 5	5" (127 mm)	4-15/16" (125 mm)	2-1/2" (64 mm)	3-3/16" (81 mm)	0.57	6.5
Star 8 BS 7	5" (127 mm)	4-15/16" (125 mm)	2-1/2" (64 mm)	3-3/16" (81 mm)	0.57	5.3
Star 5 BU	5" (127 mm)	5-1/8" (130 mm)	3" (76 mm)	3-3/16" (81 mm)	0.46	6.5
Star 11 BU	5" (127 mm)	5-1/8" (130 mm)	3" (76mm)	3-3/16" (81 mm)	0.57	6.5

**NOTE: ALWAYS INSTALL WITH SHAFT
IN HORIZONTAL POSITION**

Wilo Circo Star Bronze Single Speed Circulators

