

Submittal Data Sheet Booklet

Circulating Pumps



Product Review



Wilo-TOP-S range



Duty chart

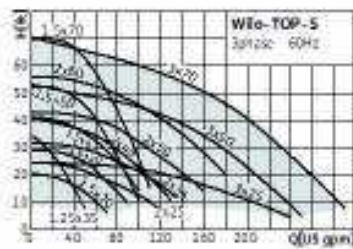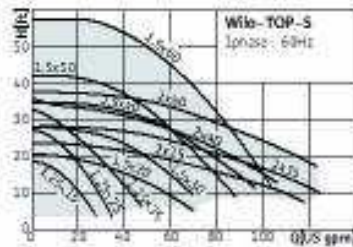

- Single-head pumps:

- Circulating pumps with flanged connection

➤ Applications:

- Pumps with cast iron body for all hot-water heating systems of all kinds, air-conditioning systems and closed cooling circuits.
- Pumps with bronze body for all warm and hot water, heating applications in open circulating systems.

➤ **Special features:**

- Cataphoresis coating for preventing corrosion in the event of condensation.
- Maintenance free single-head circulator.
- 2 speed motor
- Aluminium terminal box



WILO TOP S Submittal

Top S 1.25 x 35 Single Phase Series

WILO

Pumpen Intelligenz.

Project:

Engineer:

Contractor:

Submitted By:


Date:

Approved By:

Date:

Tag #	Model #	Flow	Head	Volt	Phase	Comments
	TOP S 1.25 X 35				1	
	TOP S 1.25 X 35				1	

Details	Max Hp	Pipe Size	l0	l1	l2	a1	a2	b1	b2	b4	b6	Weight
Imperial	1/4 Hp	1 1/4"	8 1/2	4 1/4	4 7/16	7 11/16	1 11/16	2 11/16	2 3/8	2 3/4	3 5/16	18.5 lbs
Metric	180 Watt	32 mm	216	108	113	195	42.5	69	60	70	83.5	8.4 kg

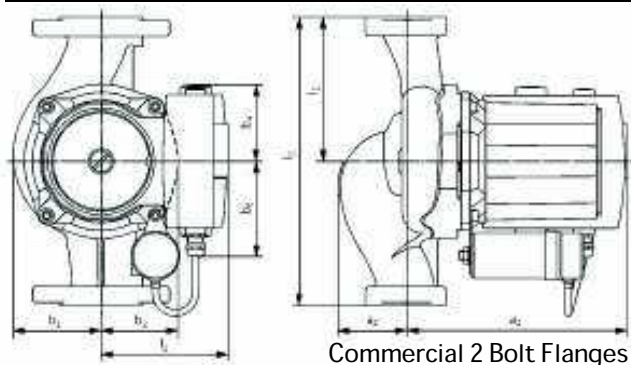

Speed	RPM	Max Watts	Amps 115 V	Amps 230 V
Max	3250	315	3.1	1.6
Min	3050	305	2.9	1.5

140 deg F (60 C)	194 deg F (90 C)	Min Inlet Pressure
1.8 PSI (12 kpa)	7.3 PSI (50 kpa)	

Operating Limits



Max Temp 14 to 248 Deg F (- 10 to 120 Deg C)

Max Ambient Temp 104 Deg F (40 Deg C)

Max Working Pressure 145 PSI (10 Bar)

Materials of Construction

Impeller	Polypropylene (50% Glass Filled)
Shaft	Stainless Steel (X40 Cr13)
Bearing	Metal Impregnated Carbon
Volute	Cast Iron (Closed Systems) Cataphoresis Coated

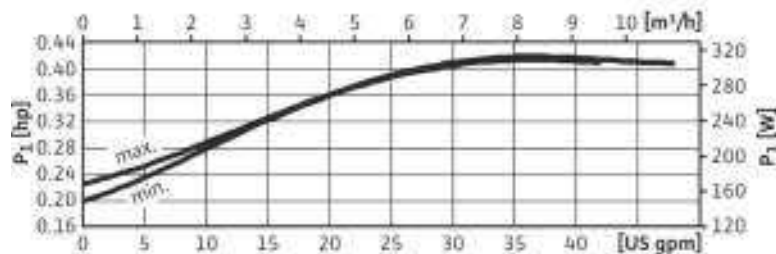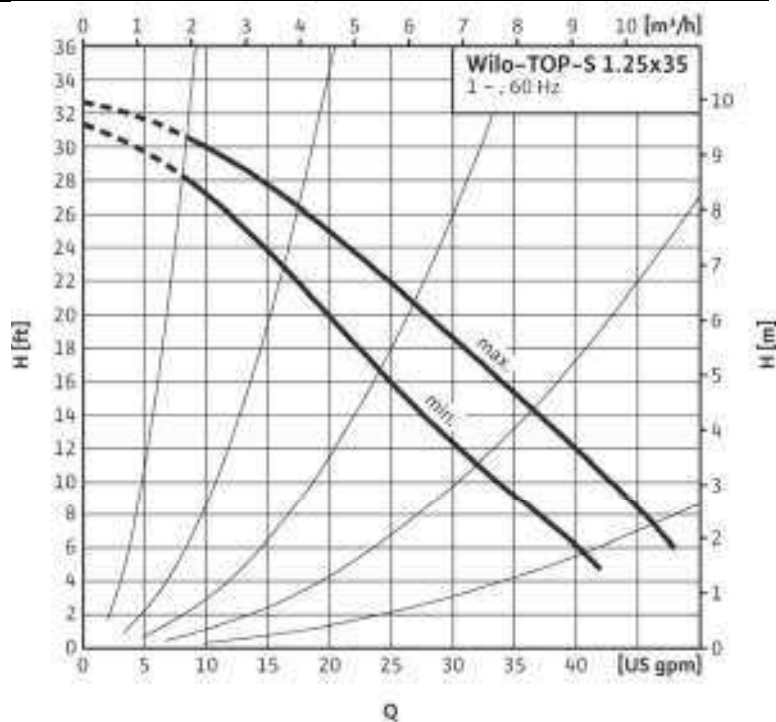

Wilo USA LLC
1290 North 25th Avenue
Melrose Park, Illinois 60160
Phone: 866 945 6872 Fax: 708 338 9455
www.wilo-na.com

Wilo Canada Inc
Bay 7 - 2915 - 10th Ave N. E.
Calgary, Alberta, T2A 5L4
Phone: 866 945 6236 Fax: 403 277 9456
www.wilo-na.com