The Woodford Model 27 drains as handle is shut off even if hose is attached. This faucet is designed for residential outside water service applications and intended for irrigation purposes.

The Close Coupled Model 27CC, with standard C inlet, is designed for use in non-freeze areas and fits within 2" x 4" stud wall. (Optional *CP or PX inlets are available but will not fit within 2" x 4" wall.*)

## **SPECIFICATIONS:**

# **MODEL 50HA BACKFLOW PREVENTER -**Patent Pending

- ASSE 1052 Approved
- Listed by IAPMO
- ASSE
- Field Testable
- Two Independent Check Valves
- Drains automatically when hose is removed
- · No spray back

## **FEATURES:**

**EXTERIOR FINISH - Brass** 

**VALVE** - Molded nitrile suitable for hot water.

NOZZLE - 3/4" male hose thread.

NO LEAD SOLDER - All solder joints.

PLUNGER - Hemispherical cushion type.

**STEM SCREW - DELRIN®** 

**HEAD NUT** - Brass


**HANDLE** - Metal. (Optional Tee Key)

INLETS - As shown.

MAX PRESSURE - 125 p.s.i.

**MAX TEMPERATURE - 120° F** 

**NOTICE -** To close and drain, turn handle clockwise until seated and water drains out of the drain hole or faucet may freeze and burst. Backflow Preventer replacement is recommended every 3-5 years.



Wall Thickness (inches)

 CC
 4
 6
 8
 10
 12
 14
 16
 18
 20
 22
 24

 2.2
 2.2
 2.3
 2.4
 2.5
 2.6
 2.7
 2.9
 3.1
 3.3
 3.5
 3.7

 Shipping Wt. (lbs)

Approx. Shipping Weight Each

\*Overall Length Dimension: Add wall thickness and inlet option length shown in chart above. *Overall length for 27CC is 2 3/4"*.

For instructions go to www.woodfordmfg.com or call 1-800-621-6032

## **Backflow Protected**


# Automatic Draining Freezeless Wall Faucet

WOODFORD


Model 27
Model 27CC (For Non-Freeze Areas ONLY)





## **Inlet Descriptions**




## C Inlet COMBINATION Copper Sweat Fitting 1/2" K, L or M Inside 3/4" M Only Outside







## CP3 Inlet COMBINATION 3/4" Male Pipe Thread 3/4" Female Sweat




#### P Inlet COMBINATION 1/2" Female Pipe Thread 3/4" Male Pipe Thread

PX Inlet 1/2" PEX Tube Fitting

**PX3 INLET** 3/4" PEX Tube Fitting

When ordering, specify model, inlet and wall thickness.



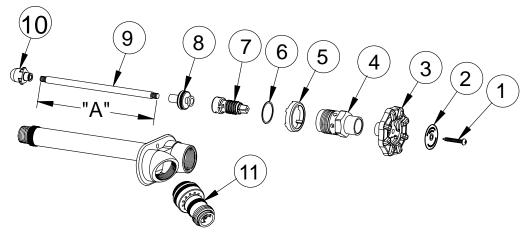

MODEL 27 PARTS LIST				
ITEM	PART#	DESCRIPTION		
1	30234	Handle Screw		
2	30439	I.D. Ring - Model 27		
3	30239	Wheel Handle - Metal		
4	30241	Head Nut - Brass		
5	30236	Drain Guard		
6	30245	Head Nut Gasket		
7	30238	Stem Screw		
8	35280	Drain Valve Assembly		
9	303XX	Operating Rod (See Chart)		
10	30230	Plunger Assembly		
11	50HA-BR	Backflow Preventer		
	RK-25	Repair Kit (Includes items 1, 3-8 & 10)		

ODEDATING DOD DIM "A"					
OPERATING ROD DIM "A"					
Wall Thickness	Length	Part No.			
CC	1-7/16"	30301			
4	4-7/16"	30304			
6	6-7/16"	30306			
8	8-7/16"	30308			
10	10-7/16"	30310			
12	12-7/16"	30312			
14	14-7/16"	30314			
16	16-7/16"	30316			
18	18-7/16"	30318			
20	20-7/16"	30320			
22	22-7/16"	30322			
24	24-7/16"	30324			



OPERATING ROD ASSEMBLY INCLUDES ITEMS 1 THRU 10				
Wall Thickness	Overall Length	Part No.		
CC	5"	35501		
4	8"	35504		
6	10"	35506		
8	12"	35508		
10	14"	35510		
12	16"	35512		
14	18"	35514		
16	20"	35516		
18	22"	35518		
20	24"	35520		
22	26"	35522		
24	28"	35524		



Manufactured under one or more of the following U.S. Patents: 3,414,001; 4,178,956; 4,316,481; 4,532,954; D216,790; D216,791; D277,365; D277,366; Canada Patents: 852,529; 865,995; 1,146,438

For more information contact...

## WOODFORD MANUFACTURING COMPANY