




Z-1712 ACCUMUTROL

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

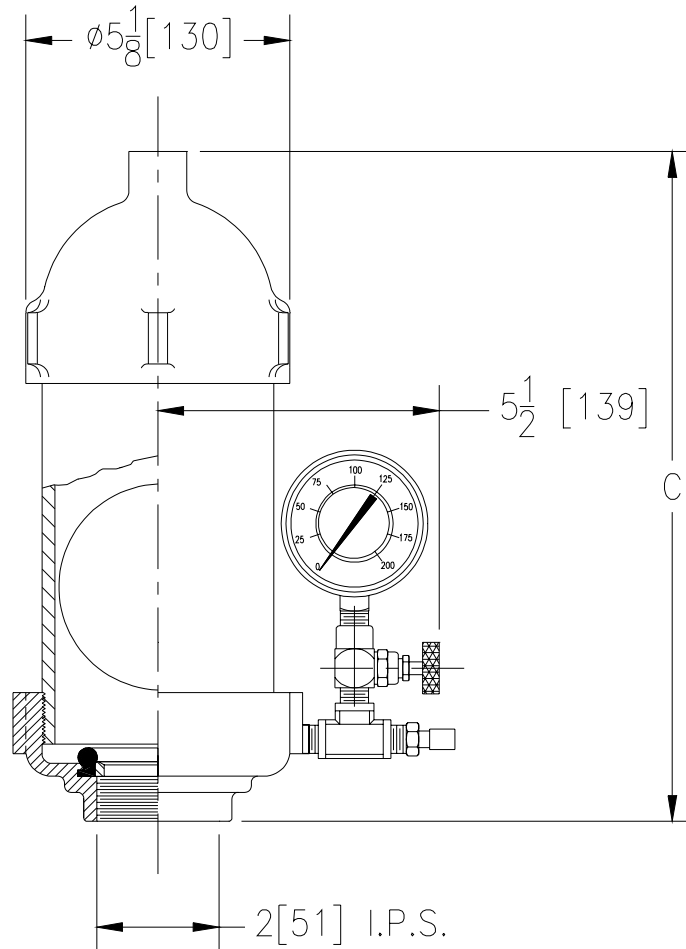

Size	C Inches	Approx. Wt. Lbs. [kg]
2000	13 [330]	20 [9]
4000	21 [533]	28 [13]
6000	29 [737]	36 [16]
8000	37 [940]	44 [20]
10000	45 [1143]	52 [24]
12000	53 [1346]	60 [27]
14000	61 [1549]	68 [31]
16000	69 [1753]	76 [34]

ENGINEERING SPECIFICATION: ZURN Z-1712 Shock associated with solenoid or other quick-closing valves serving heavy equipment such as laundry machines, dishwashers, etc. shall be controlled by installation of ZURN Z-1712 ACCUMUTROL, complete with floating stainless steel spherical piston, surge chamber, valve and gauge assembly. Specify size and location.

Note: Maximum Temperature: 500°F [260°C].
Maximum Pressure: 200PSI [1379 kPa] Residual.

PREFIXES

- ____ **Z-** Bronze surge chamber, Viton valve seat and stainless steel spherical piston.*
____ **ZS-** All Type 304 Stainless steel surge chamber, stainless steel spherical piston, Viton valve seat, and bronze gauge assembly.

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. DATE: 6/14/95 C.N. NO. 72078

DWG. NO. 59411 PRODUCT NO. Z-1712

ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292