




Z1203-N

ADJUSTABLE HORIZONTAL SIPHON JET NO-HUB

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

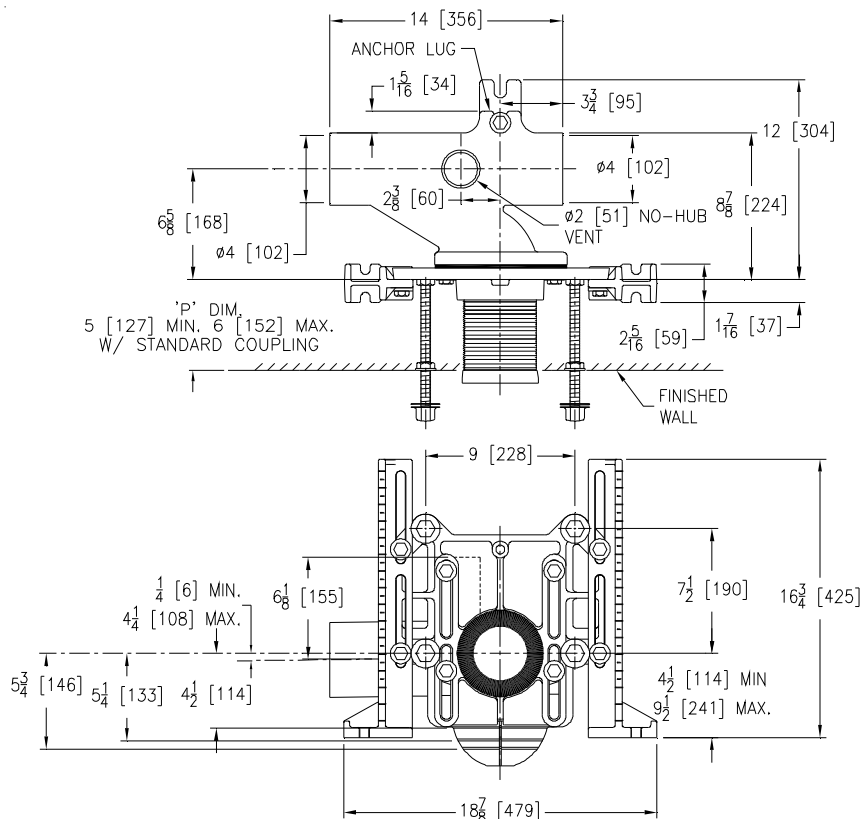

Product Number	Approx. Wt. Lbs. [kg]
Z1203-NL4	67 [30]
Z1203-NR4	

Note:

1. Min. 'P' Dim. Obtainable=2 [51]
2. Feet bolted to floor using min. 1/2 [13] dia. bolts and back slots on carrier feet.
3. Back anchor foot required for secure installation.

ENGINEERING SPECIFICATION: ZURN Z1203-N() Adjustable, horizontal siphon jet water closet "Rigid System" with 4 [102] No-Hub connections. Complete with Dura-Coated cast iron right hand, left hand, or double main fitting, with 2 [51] vent, adjustable gasketed faceplate, universal floor mounted foot supports, corrosion resistant adjustable ABS coupling with integral test cap, fixture bolts, trim, and stud protectors. Rear anchor tie down and bonded "Neo-Seal" gasket.

OPTIONS (Check/specify appropriate options)

Z1203-NR4 4 [102] No-Hub Right Hand Inlet with Flow to Left
Z1203-NL4 4 [102] No-Hub Left Hand Inlet with Flow to Right

PREFIXES

___ Z D.C.C.I. System with Zurn "ZZ" Adjustable Coupling*
___ ZC D.C.C.I. System with Compression Fit Faceplate
___ ZF D.C.C.I. System with Non-Adjustable One Piece Carrier
___ ZQ D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

SUFFIXES

___ -A Auxiliary Support Assembly
(For 'P' Dim. Greater than 18 [457])
___ -B Blowout Type Fixture Support
___ -BC Back Cleanout
___ -BE Barrel Extender (Up to 26 [660], Overall length of 40 [1016])
___ -CC Corrosion Resistant Cast Iron Coupling
(6 [151] to 12 [305])
___ -CL Coupling Length Greater Than 12 [305]
(Specified Length Required)
___ -CV Closed Vent (Use only when local codes allow)
___ -F Floor Mounted, Back Outlet Fixture Support
___ -G Galvanized Cast Iron
___ -JC 2-Inch Auxiliary Inlet with Sanitary Sweep on
Faceplate Centerline
___ -M Auxiliary Foot Support (for 'P' Dim. 10 [254] - 18 [457])
___ -PF Pre-Fab Foot
___ -PS Pre-Fab Slotted Foot
___ -RYK Unistrut Pre-Fab Foot
___ -T Threaded Connection
___ -VP Vandal-Proof Trim
___ -X3 3 [76] Carrier Foot Extension Assembly
___ -X4 4 [102] Carrier Foot Extension Assembly
___ -29 Mechanical Test Cap Assembly
___ -45 Finishing Frame for Siphon Jet System
(for Blowout System specify -45-B)
___ -50 Flush Valve Supply Support for Water Closets
___ -61 "ZZ" Coupling Wrench

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. J DATE: 2/10/11 C.N. NO. 120628

DWG. NO. 59268 PRODUCT NO. Z1203-N

ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292