




Z415B

BODY ASSEMBLY W/ "TYPE B" STRAINER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

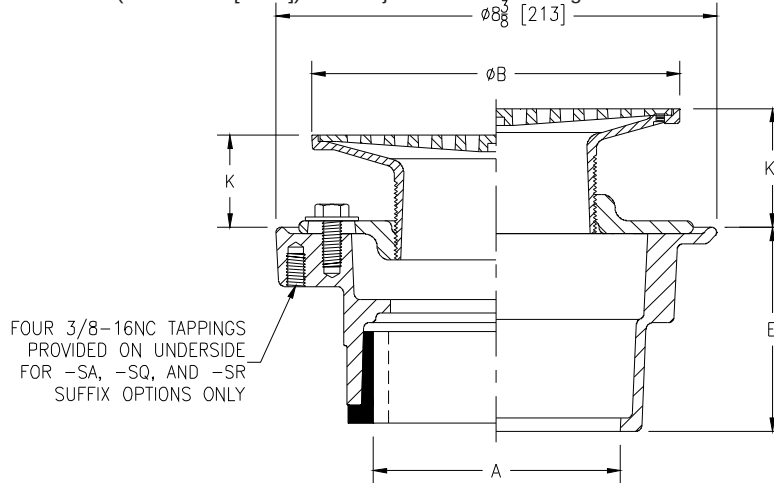

Dimensions In Inches						Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm²]
A Pipe Size	B Strainer Dia.	K		K'			
		Min.	Max.	Min.	Max.		
2-3 [51-76]	5 [127]	1 [25]	1-1/2 [38]	1-3/32 [28]	2-1/4 [57]	11 [5]	8 [52]
2-3-4 [51-76-102]	6 [152]	1 [25]	1-25/32 [45]	1-13/32 [36]	2-17/32 [64]	13 [6]	9 [58]
2-3-4 [51-76-102]	7 [178]	1 [25]	2-1/8 [54]	1-23/32 [44]	2-7/8 [73]	14 [6]	12 [77]
3-4 [76-102]	8 [203]	1-5/32 [30]	2-1/8 [54]	1-3/4 [44]	2-7/8 [73]	16 [7]	18 [116]
6 [152]	8 [203]	1-5/32 [30]	2-1/8 [54]	1-3/4 [44]	2-7/8 [73]	18 [8]	18 [116]
6 [152]	10 [254]	1-7/16 [37]	2-1/2 [64]	2 [51]	3-1/4 [83]	22 [10]	26 [168]

ENGINEERING SPECIFICATION: ZURN ZN415B

Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots and "TYPE B" polished nickel bronze, light-duty strainer.

OPTIONS (Check/specify appropriate options)**PIPE SIZE**

2 thru 4 [51 thru 102]
2 thru 4 [51 thru 102]
2 [51]
3 [76]
4 [102]
6 [152]
2 thru 4 [51 thru 102]
2 thru 4 [51 thru 102]

(Specify size/type) OUTLET

____ IC Inside Caulk
____ IG Inside Gasket
____ IP Threaded
____ IP Threaded
____ IP Threaded
____ IP Threaded
____ NH No-Hub
____ NL Neo-Loc

'E' BODY HT. DIM.

3-7/8 [98]
3-7/8 [98]
2-3/8 [60]
2-5/8 [67]
2-7/8 [73]
2-3/4 [70]
3-7/8 [98]
3-3/4 [95]

PREFIXES

____ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top
____ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top*

SUFFIXES

____ -AA All Acid Resisting Epoxy
____ -AR Acid Resisting Epoxy Coated Cast Iron
____ -C Clamp Collar for -90 Side Outlet Body
____ -CP Chrome-Plated Bronze Top
____ -DC Debris Cover (Field Assembled)
____ -DP Decorative Polished Top
____ -EF 3/8 [16] Extension Frame
____ -G Galvanized Cast Iron
____ -HD Heavy-Duty Slotted Grate (ZN 5 [127] & 6 [152] Sizes Only)
____ -OF Oval Funnel (Z329-7) (6 - 10 [152 - 254] Strainers Only)
____ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])
____ -SA Stabilizer Assembly (See Z1035)
____ -SQ Stabilizer Q-Deck (See Z1035-Q)
____ -SR Stabilizer Ring
____ -TC Neo-Loc Test Cap Gasket (2-4 [51-102] NL Outlet Only)
____ -U 1 - 3 [25 - 76] High Extension Adapter
____ -V Backwater Valve
____ -VP Vandal-Proof Secured Top
____ -W Winter Closure Plug
____ -Y Sediment Bucket
____ -4 4 [102] Diameter Funnel (Z328)
____ -18 Leveling Ring (See Z400-18)
____ -90 90° Threaded Side Outlet Body Assembly (2 [51], 3 [76] Only)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. P DATE: 06/20/11 C.N. NO. 121440

DWG. NO. 58789

PRODUCT NO. Z415B

ZURN INDUSTRIES, LLC ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292