




Z554
9 [229] MEDIUM-DUTY DRAIN WITH
SUR-SET BUCKET

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

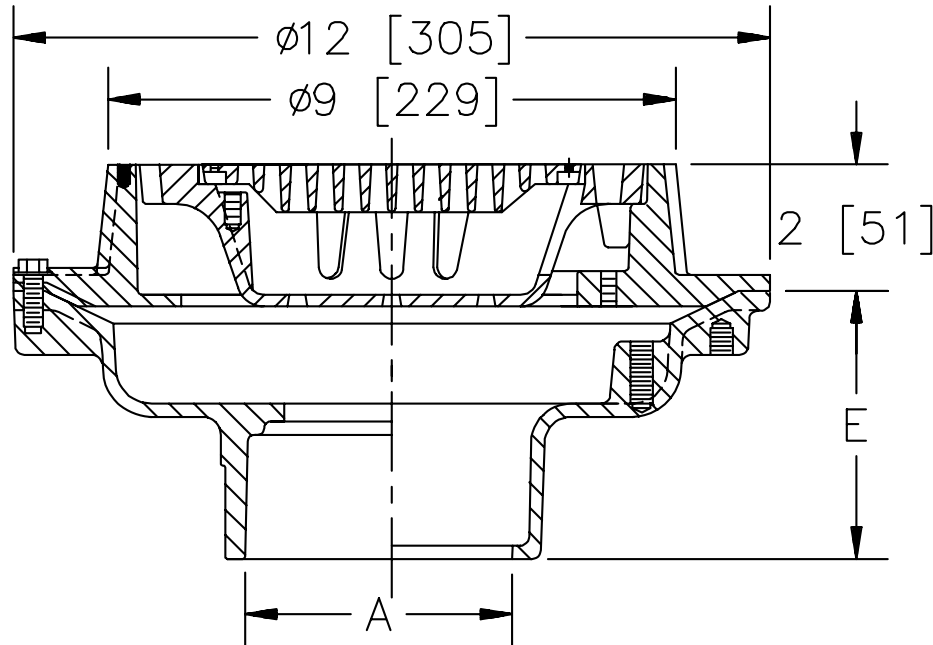

A - Pipe Size Inches [mm]	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
2-3-4 [51-76-102]	21 [10]	9 [58]

ENGINEERING SPECIFICATION: ZURN Z554

9 [229] Diameter top drain, Dura-Coated cast iron body with bottom outlet, seepage pan and combination membrane flashing clamp and frame and medium-duty cast iron grate with sur-set bucket.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2, 3, 4 [51, 76, 102]
2, 3, 4 [51, 76, 102]
2, 3, 4 [51, 76, 102]
2, 3, 4 [51, 76, 102]
2, 3, 4 [51, 76, 102]

(Specify size/type) **OUTLET**

____ IC Inside Caulk
____ IG Inside Gasket
____ IP Threaded
____ NH No-Hub
____ NL Neo-Loc

'E' BODY HT. DIM.

3-3/4 [95]
3-3/4 [95]
2-3/4 [70]
4-3/4 [121]
3-1/2 [89]

PREFIXES

____ Z D.C.C.I. Body and Top*
____ ZB D.C.C.I. Body with Polished Bronze Top (Add 3/16 [5] to 2 [51] Dim. & 3/4 [20] to 9 [229] Dim.)
____ ZN D.C.C.I. Body with Polished Nickel Bronze Top (Add 3/16 [5] to 2 [51] Dim. & 3/4 [20] to 9 [229] Dim.)

SUFFIXES

____ -AR Acid Resisting Epoxy Coated Cast Iron
____ -D Dome Grate
____ -G Galvanized Cast Iron
____ -H Hinged Grate (Z Only)
____ -P Trap Primer Connection
____ -TC Neo-Loc Test Cap Gasket
(2 [51] - 4 [102] NL Bottom Outlet Only)
____ -TS Top Secured with Slotted Screws
____ -V Backwater Valve (See Z1099)
____ -VP Vandal-Proof Secured Top
____ -90 90° Threaded Side Outlet Body
(2 [51] thru 4 [102])

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.D DATE: 11/17/10 C.N. NO. 120477

DWG. NO. 58949

PRODUCT NO. Z554

ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292