



Z1400

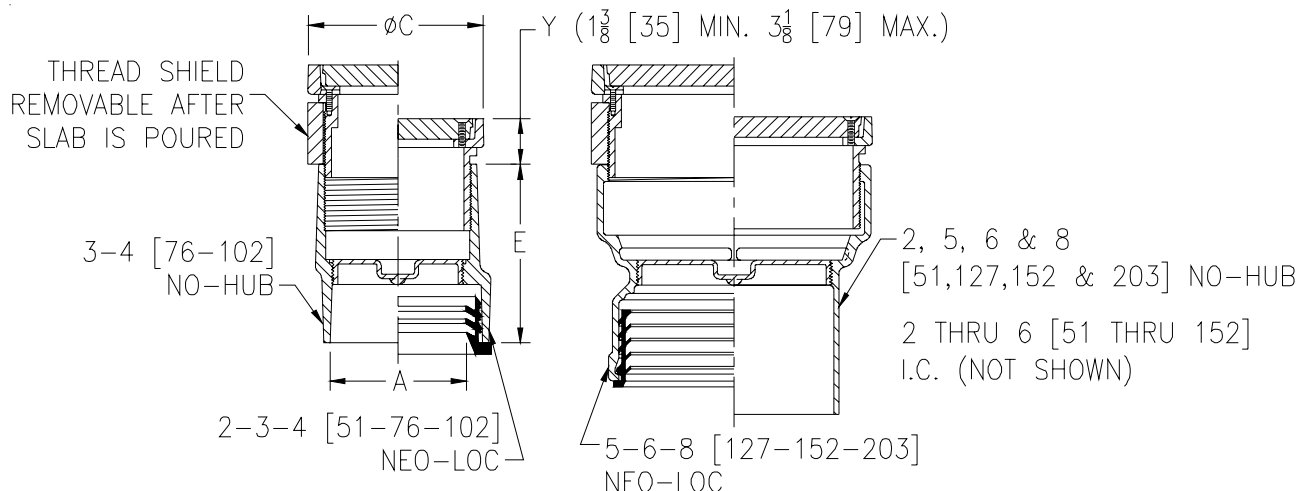
"LEVEL-TROL"

ADJUSTABLE FLOOR CLEANOUT

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

**ENGINEERING SPECIFICATION: ZURN Z1400**

"Level-Trol" Adjustable floor cleanout, Dura-Coated cast iron body, with gas and watertight ABS tapered thread plug, and round scoriated secured top (Specify finish Z, ZB, ZN, ZS) adjustable to finished floor.

OPTIONS (Check/specify appropriate options)**PREFIXES**

- ___ Z Dura Coated Cast Iron*
- ___ ZB D.C.C.I. w/ Polished Bronze Top
(Deduct 1/2 [13] from 'Y' Dim.)
- ___ ZN D.C.C.I. w/ Polished Nickel Bronze Top
(Deduct 1/2 [13] from 'Y' Dim.)
- ___ ZS D.C.C.I. w/ Polished Stainless Steel Top

SUFFIXES

- ___ -AR Acid Resisting Epoxy Coated Finish
- ___ -BP Bronze Plug
- ___ -CF Carpet Flange Cover (ZB and ZN only)
- ___ -CM Carpet Marker
- ___ -DC Duresist Cover
- ___ -DX Round ZB or ZN Top with Dex-o-tex Flange
(2 thru 4 [51 thru 102] Sizes only)
- ___ -G Galvanized Cast Iron
- ___ -HD Heavy-Duty Top (Add 1/8 [3] to 'Y' Dim.)
(ZB and ZN only)
- ___ -SG Solid Gasketed Cover
- ___ -SM Special Marking Stamped on Top
- ___ -T Square Top
- ___ -TX Square Top Recessed for 1/8 [3] Tile
(ZB and ZN only)
- ___ -VP Vandal-Proof Screws
- ___ -X Round Top Recessed for 1/8 [3] Tile
(ZB or ZN only)
- ___ -Z Round Top Recessed for 1 1/4 [32] Terrazzo
(ZB or ZN only)

Dimension In Inches			Approx. Wt. Lbs. [kg.]
A-Pipe Size	C	E	
Inside Caulk			
2 [51]	6 1/8 [156]	6 7/8 [175]	13.8 [6.3]
3 [76]	6 1/8 [156]	6 7/8 [175]	14 [6.4]
4 [102]	7 1/4 [184]	6 7/8 [175]	18.3 [8.3]
5 [127]	8 1/4 [210]	6 7/8 [175]	22.6 [10.3]
6 [152]	9 1/4 [235]	6 7/8 [175]	32.2 [14.6]
No-Hub			
2 [51]	4 1/8 [105]	7 1/2 [191]	7 [3]
3 [76]	4 1/8 [105]	5 3/8 [137]	7.7 [3.5]
4 [102]	5 1/8 [130]	5 3/8 [137]	10.3 [4.7]
5 [127]	7 1/4 [184]	7 1/2 [191]	17.6 [8]
6 [152]	8 1/4 [210]	7 1/2 [191]	22.2 [10.1]
8 [203]	9 1/4 [235]	7 1/2 [191]	29.9 [13.6]
Neo-Loc			
2 [51]	4 1/8 [105]	5 3/8 [137]	7.9 [3.6]
3 [76]	5 1/8 [130]	5 3/8 [137]	10.6 [4.8]
4 [102]	5 1/8 [130]	5 3/8 [137]	11.9 [5.4]
5 [127]	7 1/4 [184]	6 1/2 [165]	18.7 [8.5]
6 [152]	8 1/4 [210]	6 1/2 [165]	21.9 [9.9]
8 [203]	9 1/4 [235]	6 1/2 [165]	23.5 [10.7]

PIPE SIZE

2 thru 6 [51 thru 152]
2 thru 6-8 [51 thru 152-203]
2 thru 6-8 [51 thru 152-203]

(Specify size/type) OUTLET

___ IC Inside Caulk
___ NH No-Hub
___ NL Neo-Loc

'E' BODY HT. DIM.

See Chart
See Chart
See Chart

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. K DATE: 10/19/05 C.N. NO. 93985

DWG. NO. 58757 PRODUCT NO. Z1400

ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292