




Z415B

BODY ASSEMBLY W/ "TYPE B" STRAINER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

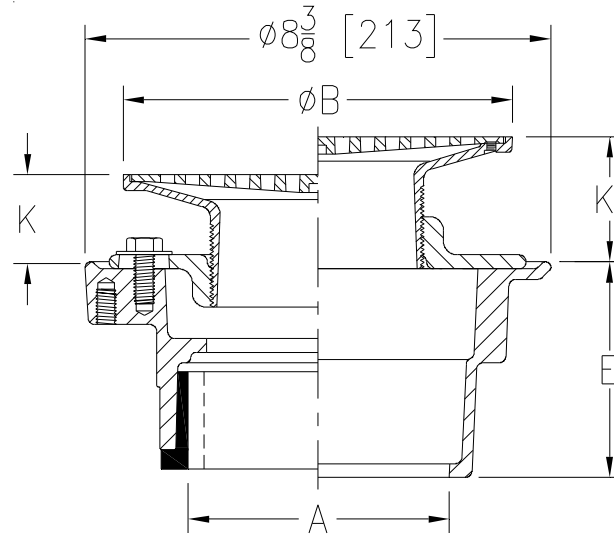

Dimensions In Inches						Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm²]
A Pipe Size	B Strainer Dia.	K		K'			
		Min.	Max.	Min.	Max.		
2-3 [51-76]	5 [127]	1/2 [13]	1 5/8 [41]	1 3/8 [35]	2 3/8 [60]	11 [5]	8 [52]
2-3-4 [51-76-102]	6 [152]	3/4 [19]	1 3/4 [44]	1 5/8 [41]	2 3/4 [70]	13 [6]	9 [58]
2-3-4 [51-76-102]	7 [178]	1 [25]	2 1/4 [57]	2 [51]	3 1/8 [79]	14 [6]	12 [77]
3-4 [76-102]	8 [203]	1 1/8 [29]	2 1/4 [57]	2 [51]	3 1/8 [79]	16 [7]	18 [116]
6 [152]	8 [203]	1 1/8 [29]	2 1/4 [57]	2 [51]	3 1/8 [79]	18 [8]	18 [116]
6 [152]	10 [254]	1 5/8 [41]	2 5/8 [67]	2 5/8 [67]	3 1/2 [89]	22 [10]	26 [168]

ENGINEERING SPECIFICATION: ZURN ZN415B Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots and "TYPE B" polished nickel bronze strainer.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2 thru 4 [51 thru 102]
2 thru 4 [51 thru 102]
2 [51]
3 [76]
4 [102]
6 [152]
2 thru 4 [51 thru 102]
2 thru 4 [51 thru 102]

(Specify size/type) OUTLET

_____ IC Inside Caulk
_____ IG Inside Gasket
_____ IP Threaded
_____ IP Threaded
_____ IP Threaded
_____ IP Threaded
_____ NH No-Hub
_____ NL Neo-Loc

'E' BODY HT. DIM.

3 7/8 [98]
3 7/8 [98]
2 3/8 [60]
2 5/8 [67]
2 7/8 [73]
2 3/4 [70]
3 7/8 [98]
3 3/4 [95]

PREFIXES

_____ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top
_____ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top*

SUFFIXES

_____ -AA All Acid Resisting Epoxy
_____ -AR Acid Resisting Epoxy Coated Cast Iron
_____ -CP Chrome-Plated Bronze Top
_____ -DC Debris Cover (Field Assembled)
_____ -DP Decorative Polished Top
_____ -EF 3/8 [10] Extension Frame
_____ -G Galvanized Cast Iron
_____ -HD Heavy-Duty Slotted Grate (ZN 5 [127] & 6 [152] Sizes Only)
_____ -OF Oval Funnel (Z329-7) (6 - 10 [152 - 254] Strainers Only)
_____ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])
_____ -SA Z1035 Stabilizer Assembly (NH & NL Outlets only)
_____ -SQ Z1035-Q Stabilizer Assembly (NH & NL Outlets only)
_____ -SR Stabilizer Ring

_____ -TC Neo-Loc Test Cap Gasket (2-4 [51-102] NL Outlet Only)
_____ -U 1 - 3 [25 - 76] High Extension Adapter
_____ -V Backwater Valve
_____ -VP Vandal-Proof Secured Top
_____ -W Winter Closure Plug
_____ -Y Sediment Bucket
_____ -4 4 [102] Diameter Funnel (Z328)
_____ -18 Leveling Ring (See Z400-18)
_____ -90 90° Threaded Side Outlet Body Assembly
(2 [51], 3 [76] Only)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. L DATE: 2/10/09 C.N. NO. 99674

DWG. NO. 58789 PRODUCT NO. Z415B

ZURN INDUSTRIES, LLC ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292