

GATE 1169

BRONZE

150 lb. SWP-300 lb. WOG† • General Service
Solid Wedge Disc • Rising Stem
Union Bonnet • Gland Packed • Sweat Ends

SPECIFICATIONS

1169	Conforms to: MSS SP-80. Type 2, Class 150, Soldered Ends.
------	--


MATERIAL LIST

NO.	PART	MATERIAL	SPECIFICATION
1	Body	Bronze	ASTM B 62
2	Bonnet	Bronze	ASTM B 62
3	Wedge Disc	Bronze	ASTM B 62
4	Stem	Bronze	ASTM B 62
5	Union Bonnet Nut	Bronze	ASTM B 62
6	Packing	Non-Asbestos	Commercial
7	Gland	Bronze	ASTM B 16
8	Packing Nut	Bronze	Commercial
9	Handwheel	Mall. Iron	Commercial
10	Identification Plate	Aluminum	Commercial
11	Handwheel Nut	Bronze	Commercial

DIMENSIONS - INCHES / MILLIMETERS

Units	Size	A	B	C	D	E
Inches	3/8	1 5/8	5 1/8	2	3/8	7/8
MM	9.53	41.28	130.18	50.80	9.53	22.23
Inches	1/2	2 1/8	5 1/2	2 1/2	1/2	1 1/8
MM	12.70	53.98	139.70	63.50	12.70	28.58
Inches	3/4	2 5/8	6 1/4	2 3/4	3/4	1 1/8
MM	19.05	66.68	158.75	69.85	19.05	28.58
Inches	1	3	7 3/16	2 3/4	29/32	1 3/16
MM	25.40	76.20	182.58	69.85	23.01	30.18
Inches	1 1/4	3 3/8	8 9/16	3 1/8	31/32	1 7/16
MM	31.75	85.73	217.50	79.38	24.61	36.53
Inches	1 1/2	3 3/4	9 5/8	3 1/2	1 3/32	1 9/16
MM	38.10	95.25	244.48	88.90	27.79	39.70
Inches	2	4 5/16	11 3/4	4	1 11/32	1 5/8
MM	50.80	109.55	298.45	101.60	34.13	41.28
Inches	2 1/2	5 1/4	14 1/4	4 3/4	1 15/32	2 5/16
MM	63.50	133.35	361.95	120.65	37.31	58.75
Inches	3	5 3/4	16 1/2	5 1/4	1 21/32	2 7/16
MM	76.20	146.05	419.10	133.35	42.07	61.93

† Non-Shock

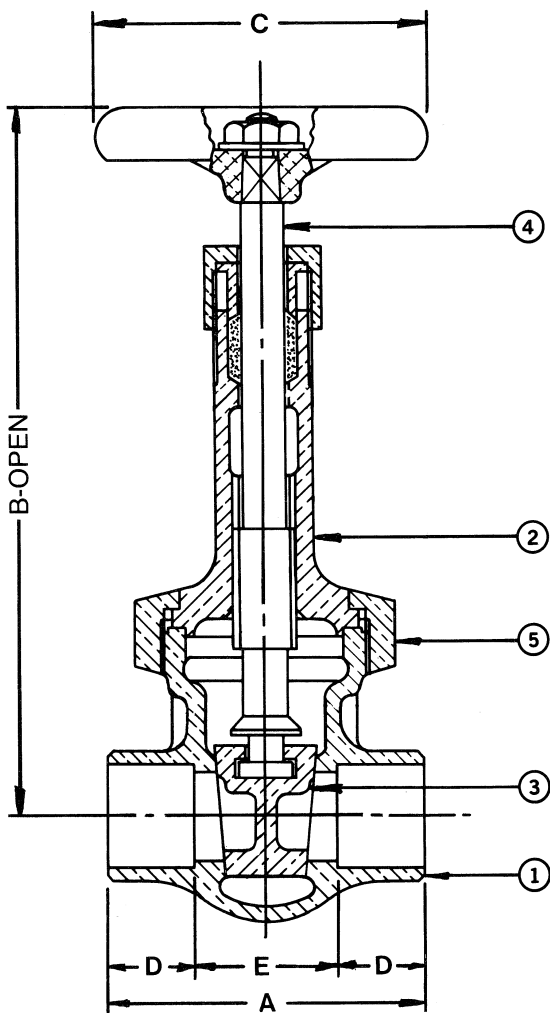

INNOVATION IN EVERY VALVE



MILWAUKEE VALVE