



Hourly Analysis Program (HAP)

What is HAP?

Carrier's Hourly Analysis Program (HAP) is two powerful tools, in one package. HAP provides versatile features for designing HVAC systems for commercial buildings. It also offers powerful energy analysis capabilities for comparing the energy consumption and operating costs of design alternatives. By combining both tools in one package, significant time savings are achieved. Input data and results from system design calculations can be used directly in energy studies.

Who Can Benefit From HAP?


HAP is designed for consulting engineers, design/build contractors, HVAC contractors, facility engineers and other professionals involved in the design and analysis of commercial building HVAC systems.

System Design Features

- HAP uses a system-based approach to design calculations, which tailors sizing procedures and reports to the specific type of system being designed. This offers productivity advantages over simple "load calculation" programs which require the engineer to apply calculation results to size system components.
- Features are suitable for sizing systems involving central station air handlers, packaged rooftop units, vertical units, split systems, DX fan coils, hydronic fan coils and water source heat pumps.
- Sizing data is provided for central cooling and heating coils, preheat and precool coils, fans, humidifiers, terminal reheat coils, CAV and VAV air terminals, fan powered mixing boxes, perimeter baseboard units, fan coils and terminal heat pumps plus chillers and boilers.
- The ASHRAE Transfer Function Method is used to calculate building heat flow.
- Key sizing reports summarize data needed for equipment selection in 2 simple pages.
- Additional reports provide component loads, hourly load profiles, detailed hourly performance data and psychrometric charts.
- The program is suitable for new construction and retrofit applications.

Energy Analysis Features

- HAP performs a true hour-by-hour energy analysis, using measured weather data for all 8,760 hours of the year to calculate building heat transfer and loads, air system operation, and plant equipment operation.
- Hourly energy consumption by HVAC components (e.g., compressors, fans, pumps, heating elements) and non-HVAC components (e.g., lighting, office equipment, machinery) is tabulated to determine the total building energy use profile as well as daily and monthly totals.
- Energy consumption data and utility rate information is used to calculate the energy cost for each energy source or fuel type.
- Because energy analysis reuses input data from the system design work, typically 50% to 75% of the input work needed for an energy analysis is complete once you finish system design.

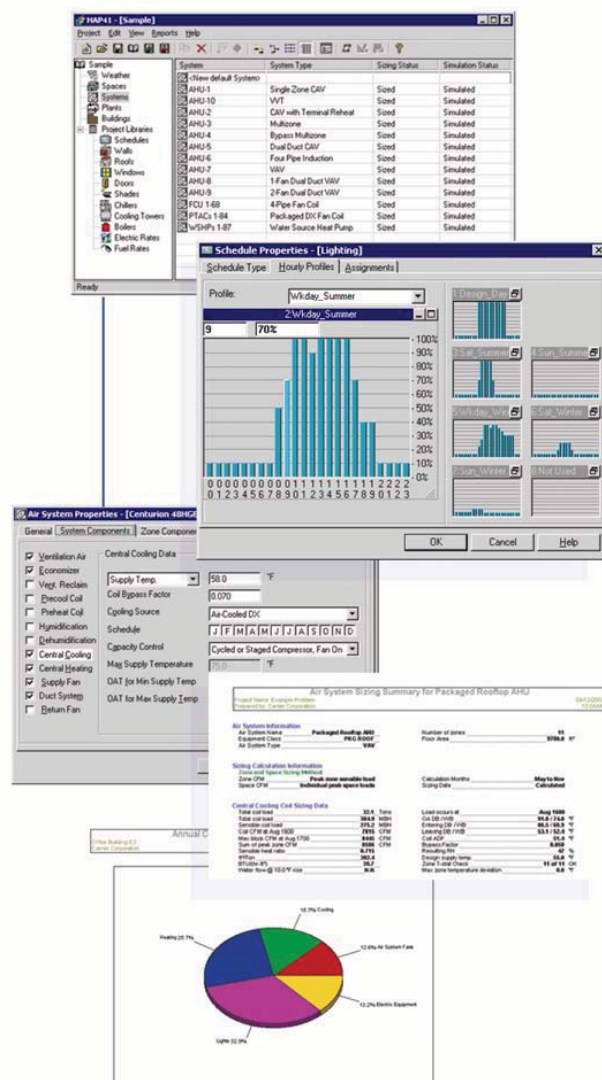

How to Order

HAP is part of Carrier's E20-II family of HVAC design programs. For information and to order the software, please contact your local Carrier sales office, or, in the US and Canada, contact Carrier at:

Phone: 1-315-432-6838

Fax: 1-315-432-6844

email: software.systems@carrier.utc.com

Web: www.commercial.carrier.com

Computer Requirements: Operating System: Windows 98, 2000, XP, Vista or NT compatible.
Processor: Pentium or higher. RAM: 64 MB minimum. Video: SVGA or higher.

Climate Analysis Features

- Provides a database of design weather data for over 800 cities worldwide.
- Uses TMY2, IWECC, CWECC, TMY and TRY-type hourly weather data for energy simulations.
- Provides a library of simulation weather data for over 500 cities worldwide (included on CD-ROM).

Load Calculation Features

- Uses ASHRAE procedures for Transfer Function cooling load calculations, design heating load calculations, solar radiation calculations.
- Calculates room and zone loads 24 hours a day for design days in all 12 months.
- Identifies peak room, zone, and coil loads.
- Permits hourly and seasonal scheduling of occupancy, internal loads, and fan and thermostat operation.

System Design Reports

- Provides features for copy-and-paste from displayed reports into other documents, and for saving reports as RTF-format documents.

Air System Analysis Features

- Performs detailed hour-by-hour simulations of the thermal and mechanical behavior of air handling systems for both system design and energy analysis.
- Equipment types include:
 - Packaged Rooftop Units
 - Packaged Vertical Units
 - Split DX Air Handling Units
 - Chilled Water Air Handling Units
 - Packaged and Split DX Fan Coils
 - Hydronic Fan Coils
 - Water Source Heat Pumps
- System types include:
 - Single Zone CAV
 - CAV with Terminal Reheat
 - Multizone CAV
 - Bypass Multizone CAV
 - Dual Duct CAV
 - 4-Pipe Induction
 - Tempering Ventilation
 - VAV and VAV with Reheat, Series Fan Powered Mixing Boxes, Parallel Fan Powered Mixing Boxes, or mixed terminals.
 - 1-Fan Dual Duct VAV
 - 2-Fan Dual Duct VAV
 - VVT
- Systems are configurable with many controls and components including:
 - Supply air temperature reset.
 - Ventilation airflow control.
 - Outdoor air economizers
 - Ventilation air heat reclaim devices.
 - Humidistats and humidifiers.
 - Preheat and precool coils.
 - Perimeter baseboard and fan coil heaters.
- Permits scheduling of thermostats, fans, cooling and heating on an hourly, daily and monthly basis.

Plant Equipment Features

- Performs detailed hour-by-hour simulations of plant part-load performance.
- Plant types include:
 - Chiller plants.
 - District chilled water.
 - Hot water boiler plants.
 - Steam boiler plants.
 - District hot water.
 - District steam.
- Models the following chiller types:
 - Water-cooled centrifugal
 - Water-cooled rotary screw.
 - Water-cooled packaged screw
 - Water-cooled packaged reciprocating
 - Water-cooled packaged scroll.
 - Water-cooled single-effect absorption
 - Water-cooled double-effect absorption.
 - Water-cooled direct-fired absorption.
 - Water-cooled engine chiller.
 - Air-cooled packaged screw.
 - Air-cooled packaged reciprocating.
 - Air-cooled packaged scroll.
- Chiller plants can be configured with the following components and controls:
 - Three types of sequencing controls.
 - Free cooling by strainer cycle or plate-frame HX.
 - Chilled water distribution systems including primary/secondary and variable speed pumps.

Utility Rate Features

- Models five common types of electric energy charges.
- Models demand charges for both electric and fuel rates.
- Permits seasonal and time-of-day energy and demand pricing to be defined.

Energy Analysis Reports

- Summary reports compare energy use and energy cost of alternate building designs.
- Detailed reports provide annual, monthly, daily and hourly performance data.
- Extensive use of graphics allows patterns of equipment performance to be quickly understood.
- Features provided for copy-and-paste from displayed reports to other documents, and for saving reports as RTF documents.
- Feature for exporting simulation results to ASCII text disk files makes importing results into spreadsheets simple.

Miscellaneous

HAP energy analysis exceeds the minimum requirements for the Energy Cost Budget compliance path for ASHRAE Standard 90.1.



Block Load

What is Block Load?

Carrier's Block Load program is a powerful, fully featured HVAC load estimating program suitable for commercial buildings of any size.

Who Can Benefit From Block Load?

Block Load is a tool for consulting engineers, design/build contractors, HVAC contractors, facility engineers and other professionals involved in the design, analysis or installation of commercial building HVAC systems.

How Does It Work?




Block Load asks you to supply basic information about your building, and then provides you with all the sizing and load information you need to analyze and design the HVAC system and select all of the air conditioning equipment.

Load Calculation Features

- Uses ASHRAE procedures for Transfer Function cooling load calculations, design heating load calculations, solar radiation calculations.
- Calculates room and zone loads 24 hours a day for design days in all 12 months.
- Identifies peak room, zone, and coil loads.
- Suitable for sizing systems involving central station air handlers, packaged rooftop units, self-contained units, split systems, DX fan coils, hydronic fan coils and water source heat pumps.
- Sizing data is provided for central cooling and heating coils, preheat coils, fans, terminal reheat coils, CAV and VAV air terminals, fan coils and terminal heat pumps.
- Analysis of ventilation requirements using procedure described in ASHRAE Standard 62-2001.
- Provides a database of design weather data for over 700 cities worldwide.

Report Features

- Provides many well-formatted reports listing calculation results as well as input data
- Key system sizing report summarizes data needed for equipment selection on 1-2 pages
- Key ventilation report summarizes requirements for each zone in the system
- Additional reports provide zone and system component loads, hourly zone and system load profiles, detailed hourly psychrometric data and a graph of the psychrometric process
- Provides features for copy-and-paste from displayed reports into other documents.
- Provides features for saving reports as files in RTF-, PDF- or HTML- format documents.
- Advanced output reports available to help in the diagnosis of load results and system behavior.

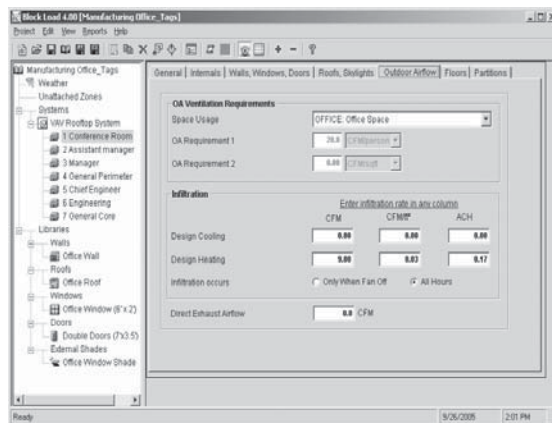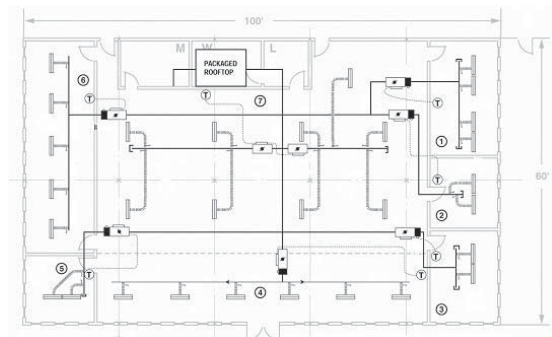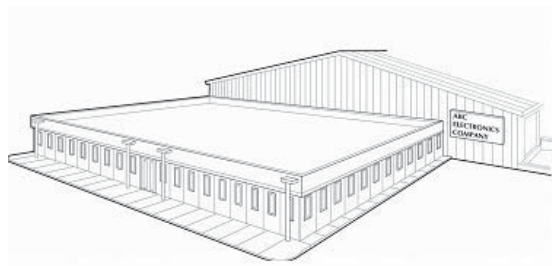

Computer Requirements: Operating System: Windows 98, NT, ME, or 2000 compatible.
RAM: 64 MB minimum. Video: VGA w/ 800 x 600 resolution and 256 colors.

Other Program Features

- Tree view in main window allows for easier program navigation and data viewing
- Choice of conventional input format or spreadsheet style input for building data
- Runs in English and SI Metric units
- Suitable for new construction and retrofit applications.
- Provides a database of design weather data for over 700 cities worldwide.
- Provides feature for archiving and retrieving project data
- Provides feature for converting Block Load v3.0 data into Block Load v4 data
- Provides a global search and replace feature for all building data
- Provides a feature to automatically change the orientation of the entire building
- Program is network compatible

How to Order

Block Load is available on a license basis. The first year and all subsequent annual license fees entitles the licensee to regular program updates and technical support from our HVAC Systems Engineers.

To license Block Load, please contact your local Carrier sales office, or, in the US and Canada, contact Carrier at:

Phone: 1-315-432-6838

Fax: 1-315-432-6844

email: software.systems@carrier.utc.com

Web: www.commercial.carrier.com

SAMPLE REPORTS

