



MODEL **3250-01**
3605-01

Electronic Actuated Differential Pressure Relief Valve




Schematic Diagram

Item	Description
1	Hytrol (Main Valve)
2	X42N-2 Stainer & Needle Valve
3	CDB-30 Electronic Differential Pressure Pilot
4	DPT- Differential Pressure Transmitter
5	CK2 Cock (Isolation Valve)

Optional Features

Item	Description
B	CK2 Cock (Isolation Valve)
D	Check Valves with Cock
E	X117D Position Transmitter
F	Remote Pilot Sensing (H.P.)
S	CV Flow Control (Opening)

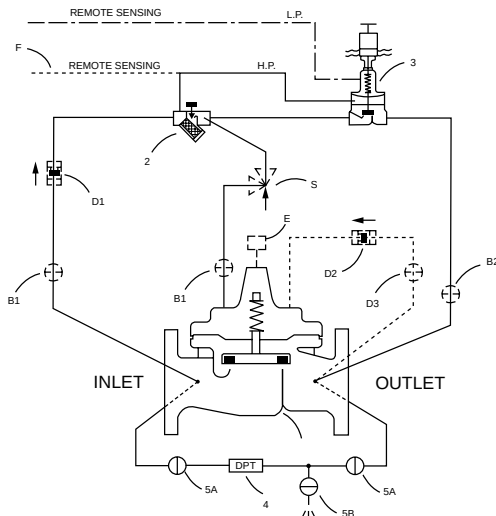

- Simplified Interfacing with SCADA Systems
- Accepts Local or Remote SetPoint
- Integral Loop Power Supply
- Accurate Flow and Pressure Control
- Reliable Hydraulic Operation
- Rugged Durable Design


The Cla-Val Model 3250-01/3605-01 Electronic Actuated Differential Relief Pressure Control Valve combines the precise control of a field proven Cla-Val hydraulic pilot and the convenience and versatility of remote setpoint control. The Model 3250-01/3605-01 Control Valve is a hydraulically operated, pilot controlled, modulating valve. It is designed to maintain a constant pressure differential between any two pressure points in a system where the closing of the valve directly causes the differential pressure to increase. The valve tends to open on an increase in differential pressure and close on a decrease in differential pressure. The pilot control, consisting of a hydraulic pilot and integral controller, accepts a setpoint and compares it with a differential pressure or internal potentiometer position signal and makes incremental adjustments to modulate the valve to a setpoint.

Adjustable solid-state limit switches eliminate over ranging. In the event of a power or transmitter failure, the CDB-30 hydraulic pilot remains in valve control virtually assuring system stability under changing conditions. If check feature ("D") is added, and pressure reversal occurs, the valve closes to prevent return flow.

Typical Applications

The valve is designed to be used with supervisory control systems having an isolated remote analog setpoint output and a process variable system differential pressure input. On a chill water circulating closed-loop system the 3250-01/3605-01 Differential Pressure Relief Valve is installed between loop supply and return lines to maintain a constant differential across the loop. The loop differential pressure remains constant regardless of the loop demand changes thereby increasing cooling system efficiency. It is also an effective solution for lowering costs associated with "confined space" requirements by eliminating need for entry into valve structure for setpoint adjustment and system information.

Additional Pilot Controls, hydraulic and/or electronic, can be easily added to perform multiple control functions to fit exact system requirements.

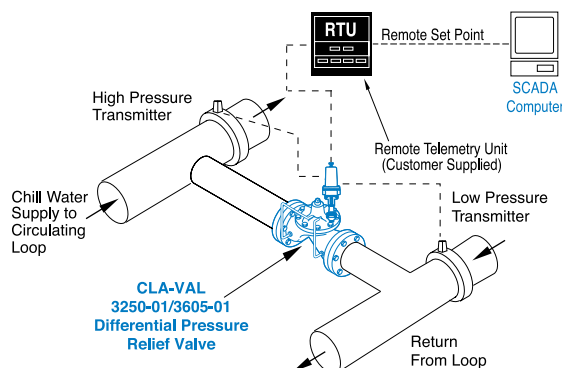

Model 3250-01 (Uses Basic Valve Model 100-01)

Pressure Ratings (Recommended Maximum Pressure - psi)

Valve Body & Cover		Pressure Class			
		Flanged			Screwed
Grade	Material	ANSI Standards*	150 lb.	300 lb.	End Details**
ASTM A536	Ductile Iron	B16.42	250	400	400
ASTM A216-WCB	Cast Steel	B16.5	285	400	400
ASTM B62	Bronze	B16.24	225	400	400
ASTM A743	Stainless Steel	B16.5	285	400	400
356-T6	Aluminum	B16.1	275	—	—

Note: *ANSI standards are for flange dimensions only.
 Flanged valves are available faced but not drilled.
 ** End Details machined to ANSI B2.1 specifications.



2" Globe, Screwed




4" Globe, Flanged


Materials

Component	Material Options						
Body & Cover	Ductile Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Available Sizes	1¼" - 16", 24"	1¼" - 16", 24"	1¼" - 16"	1¼" - 16"	1¼" - 16"		
Disc Retainer & Diaphragm Washer	Cast Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Trim: Disc Guide, Seat & Cover Bearing	Bronze is standard. Stainless Steel is optional.			Stainless Steel is standard.			
Disc	Buna-N® Rubber						
Diaphragm	Nylon Reinforced Buna-N® Rubber						
Stem, Nut & Spring	Stainless Steel						

Dimensions (In inches)

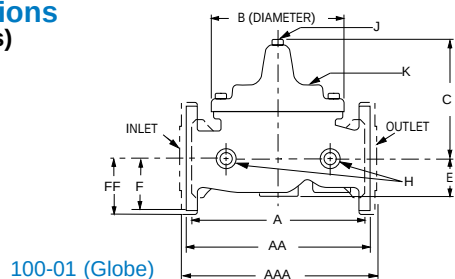

100-01 (Globe)



100-01 (Angle)



4" Angle, Flanged

Valve Size (Inches)	1½-1½	2	2 ½	3	4	6	8	10	12	14	16	24
A Screwed	7.25	9.38	11.00	12.50	—	—	—	—	—	—	—	—
AA 150 ANSI	8.50*	9.38	11.00	12.00	15.00	20.00	25.38	29.75	34.00	39.00	41.38	61.50
AAA 300 ANSI	9.00*	10.00	11.62	13.25	15.62	21.00	26.38	31.12	35.50	40.50	43.50	63.24
B Dia.	5.62	6.62	8.00	9.12	11.50	15.75	20.00	23.62	28.00	32.75	35.50	53.16
C Max.	5.50	6.50	7.56	8.19	10.62	13.38	16.00	17.12	20.88	24.19	25.00	43.93
D Screwed	3.25	4.75	5.50	6.25	—	—	—	—	—	—	—	—
DD 150 ANSI	4.00*	4.75	5.50	6.00	7.50	10.00	12.75	14.88	17.00	19.50	20.81	—
DDD 300 ANSI	4.25*	5.00	5.88	6.38	7.88	10.50	13.25	15.56	17.75	20.25	21.62	—
E	1.12	1.50	1.69	2.06	3.19	4.31	5.31	9.25	10.75	12.62	15.50	17.75
F 150 ANSI	2.50	3.00	3.50	3.75	4.50	5.50	6.75	8.00	9.50	10.50	11.75	19.25
FF 300 ANSI	3.06	3.25	3.75	4.13	5.00	6.25	7.50	8.75	10.25	11.50	12.75	—
G Screwed	1.88	3.25	4.00	4.50	—	—	—	—	—	—	—	—
GG 150 ANSI	4.00*	3.25	4.00	4.00	5.00	6.00	8.00	8.62	13.75	14.88	15.69	—
GGG 300 ANSI	4.25*	3.50	4.31	4.38	5.31	6.50	8.50	9.31	14.50	15.62	16.50	—
H NPT Body Tapping	3/8	3/8	1/2	1/2	3/4	3/4	1	1	1	1	1	1
J NPT Cover Center Plug	1/4	1/2	1/2	1/2	3/4	3/4	1	1	1 ¼	1 ½	2	1 ½
K NPT Cover Tapping	3/8	3/8	1/2	1/2	3/4	3/4	1	1	1	1	1	1
Valve Stem Internal Thread UNF	10-32	10-32	10-32	¼-28	¼-28	⅜-24	⅜-24	⅜-24	⅜-24	⅜-24	½-20	¾-16
Stem Travel	0.4	0.6	0.7	0.8	1.1	1.7	2.3	2.8	3.4	4.0	4.5	6.50
Approx. Ship Wt. Lbs.	15	35	50	70	140	285	500	780	1165	1600	2265	6200

*1½" Size Only

Model 3605-01 (Uses Basic Valve Model 100-20)

Pressure Ratings (Recommended Maximum Pressure - psi)



Valve Body & Cover		Pressure Class		
		Flanged		
Grade	Material	ANSI Standards*	150 lb.	300 lb.
ASTM A536	Ductile Iron	B16.42	250	400
ASTM A216-WCB	Cast Steel	B16.5	285	400
ASTM B62	Bronze	B16.24	225	400
ASTM A743	Stainless Steel	B16.5	285	400
356-T6	Aluminum	B16.1	275	—

Note: *ANSI standards are for flange dimensions only.
Flanged valves are available faced but not drilled.

Materials

Component	Material Options						
Body & Cover	Ductile Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Available Sizes	3"-30"	3"-30"	3"-16"	3"-16"	3"-16"		
Disc Retainer & Diaphragm Washer	Cast Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Trim: Disc Guide, Seat & Cover Bearing	Bronze is standard. Stainless Steel is optional.			Stainless Steel is standard.			
Disc	Buna-N® Rubber						
Diaphragm	Nylon Reinforced Buna-N® Rubber						
Stem, Nut & Spring	Stainless Steel						

Dimensions (In inches)

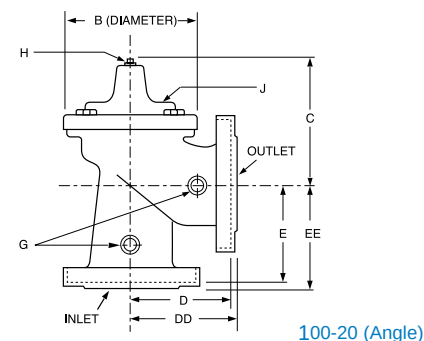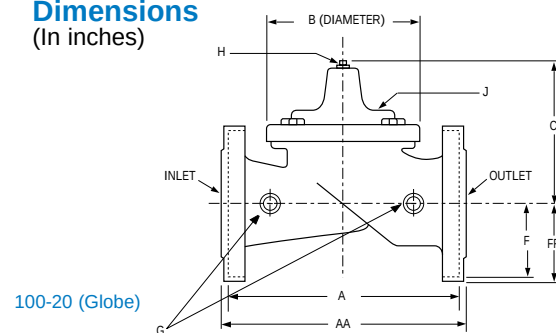

3" Globe, Flanged

VALVE SIZE (Inches)	3	4	6	8	10	12	14	16	18	20	24	30
A 150 ANSI	10.25	13.88	17.75	21.38	26.00	30.00	34.25	35.00	42.12	48.00	48.00	63.25
AA 300 ANSI	11.00	14.50	18.62	22.38	27.38	31.50	—	36.62	43.63	49.62	49.75	—
B DIA.	6.62	9.12	11.50	15.75	20.00	23.62	28.00	28.00	35.44	35.44	35.44	53.19
C MAX.	7.00	8.62	11.62	15.00	17.88	21.00	20.88	25.75	25.00	31.00	31.00	43.94
D 150 ANSI	—	6.94	8.88	10.69	—	—	—	—	—	—	—	—
DD 300 ANSI	—	7.25	9.38	11.19	—	—	—	—	—	—	—	—
E 150 ANSI	—	5.50	6.75	7.25	—	—	—	—	—	—	—	—
EE 300 ANSI	—	5.81	7.25	7.75	—	—	—	—	—	—	—	—
F 150 ANSI	3.75	4.50	5.50	6.75	8.00	9.50	11.00	11.75	15.88	14.56	17.00	19.88
FF 300 ANSI	4.12	5.00	6.25	7.50	8.75	10.25	—	12.75	15.88	16.06	19.00	—
G NPT Body Tapping	3/8	1/2	3/4	3/4	1	1	1	1	1	1	1	1
H NPT Cover Center Plug	1/2	1/2	3/4	3/4	1	1	1 1/4	1 1/4	2	2	2	2
J NPT Cover Tapping	3/8	1/2	3/4	3/4	1	1	1	1	1	1	1	1
Valve Stem Internal												
Thread UNF	10-32	1/4-28	1/4-28	3/8-24	3/8-24	3/8-24	3/8-24	3/8-24	1/2-20	1/2-20	1/2-20	3/4-16
Stem Travel	0.6	0.8	1.1	1.7	2.3	2.8	3.4	3.4	4.5	4.5	4.5	6.5
Approx Ship Wt. Lbs.	45	85	195	330	625	900	1250	1380	2733	2551	2733	6500

3250-01/3605-01 Purchase Specifications

The 3250-01/3605-01 Electronic Actuated Differential Pressure Control Valve shall have an integral hydraulic and electronic controller contained in a NEMA 4 enclosure to provide the interface between remote telemetry and valve control. It will compare a selectable remote analog or local setpoint with a process variable signal or internal position sensor signal and automatically adjust the hydraulic pilot control until the main control valve reaches desired setpoint.

The electronic actuator will supply loop power for the process variable signal. Retransmission of the process variable shall be with an isolated non-powered analog signal. The actuator speed will be infinitely adjustable between 1/3 and 5 RPM and will have an adjustable dead band. In the event of an erroneous communications signal, actuator output will be capable of being limited to a predetermined process variable value. If these signals (SP and/or PV) are lost, the valve shall remain under control of the differential pressure relief hydraulic control. The actuator can also be programmed to drive the main valve to the open or closed position if these signals are lost.

All setup and adjustments will be capable of being made prior to placing the valve into service using actuator test points for signal measurement and subsequent calibration. Actuator diagnostics will be displayed using LEDs. Manual operation of the hydraulic pilot will be fully adjustable using a non-rotating handwheel.

The Electronic Actuated Differential Pressure Control Valve shall be the Cla-Val Model 3250-01/3605-01 as manufactured by Cla-Val, Newport Beach, CA.

Valve Selection

Valve Selection		These Symbols  and  Indicate Available Sizes																
		Inches	1 1/4	1 1/2	2	2 1/2	3	4	6	8	10	12	14	16	18	20	24	30
		mm	32	40	50	65	80	100	150	200	250	300	350	400	450	500	600	750
		End Detail	Screwed	Screwed & Flanged				Flanged										
Model 3250-01	Basic Valve 100-01	Globe																
		Angle																
	Suggested Flow (GPM)	Max. Continuous	93	125	210	300	460	800	1800	3100	4900	7000	8400	11000			25000	
		Max. Surge	120	280	470	670	1000	1800	4000	7000	11000	16000	19000	25000			56500	
	Suggested Flow (Liters/sec)	Max. Continuous	6	8	13	19	29	50	113	195	309	441	529	693			1575	
		Max. Surge	13	18	30	42	63	113	252	441	693	1008	1197	1575			3560	
Model 3605-01	Basic Valve 100-20	Globe																
		Angle																
	Suggested Flow (GPM)	Max. Continuous					260	580	1025	2300	4100	6400	9230	9230	16500	16500	16500	28000
		Max. Surge					440	990	1760	3970	7050	11000	15900	15900	28200	28200	28200	56500
	Suggested Flow (Liters/sec)	Max. Continuous					16	37	65	145	258	403	581	581	1040	1040	1040	1764
		Max. Surge					28	62	111	250	444	693	1002	1002	1777	1777	1777	3560

* 3605-01 is the reduced internal port size version of the 3250-01.

For 100-01 basic valves suggested flow calculations were based on flow through Schedule 40 Pipe. Maximum continuous flow is approx. 20 ft/sec (6.1 meters/sec) & maximum surge is approx. 45 ft/sec (13.7 meters/sec). For 100-20 basic valves suggested flow calculations were based on flow through the valve seat. Approx. 26 ft/sec (7.9 meters/sec) is used for continuous flow & 45 ft/sec (13.7 meters/sec) is used for surge flow. Maximum continuous flow through the valve seat for the 30" 100-20 is approx. 20 ft/sec (6.1 meters/sec). **Flanged End Detail Only

We recommend providing adequate space around valve for maintenance work

Pilot System Specifications

Adjustment Ranges

0 to 7 psi	50 to 150 psi
5 to 25 psi	65 to 180 psi
20 to 80 psi	

Temperature Range

Water: to 180°F

Materials

Standard Pilot System Materials

Pilot Control: Bronze ASTM B62
Trim: Stainless Steel Type 303
Rubber: Buna-N® Synthetic Rubber

Optional Pilot System Materials

Pilot Systems are available with optional Aluminum, Stainless Steel or Monel materials at extra cost.

Electronic Actuator - CDB-30 Pilot Control

Input Voltage:	120/240 Vac +/- 10%, 50/60 Hz
Operating Current:	2 Amperes at 120 Vac
Process Variable:	Field Selectable between 4-20mA transmitter (supplied by others) or internal potentiometer
Loop Power Supply:	0-24 VDC
Retransmission:	Isolated non-powered 4-20mA
Input Signal Monitor:	If process variable is lost, actuator holds in present position opens or closes, field selectable
Setpoint:	Field selectable between local and remote 4-20 mA, 0-5 Volt, 0-10 Volt
Manual Adjustment:	Non-rotating handwheel
Limit Switches:	Electronic full range adjustable
Terminations:	Terminal blocks accepting up to #16 Awg solid or stranded wire
Operating Temperature:	0°F to 150 °F (-18 C to 65 C)
Environmental Rating:	Enclosure rated NEMA type 4 indoor/outdoor, corrosion resistant aluminum

When Ordering, Please Specify

- Catalog No. 3250-01 or 3605-01
- Valve Size
- Pattern - Globe or Angle
- Pressure Class
- Screwed or Flanged
- Trim Material
- Adjustment Range
- Desired Options
- When Vertically Installed



E-3250-01/3605-01 (R-11/01)

CLA-VAL

PO Box 1325 Newport Beach CA 92659-0325
Phone: 949-722-4800 • Fax: 949-548-5441

CLA-VAL CANADA, LTD.

4687 Christie Drive
Beamsville, Ontario
Canada LOR 1B4
Phone: 905-563-4963
Fax: 905-563-4040

©COPYRIGHT CLA-VAL 2001 Printed in USA
Specifications subject to change without notice.

CLA-VAL SA

Chemin des Mesanges 1
CH-1032 Romanel/
Lausanne, Switzerland
Phone: 41-21-643-15-55
Fax: 41-21-643-15-50

www.cla-val.com

Represented By: