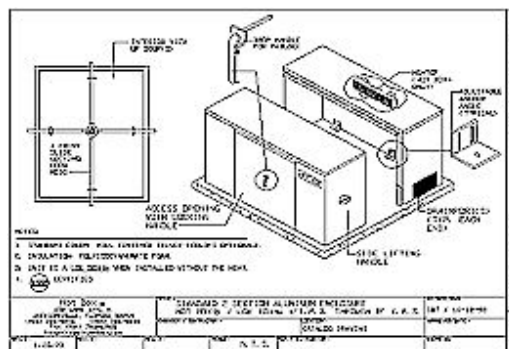
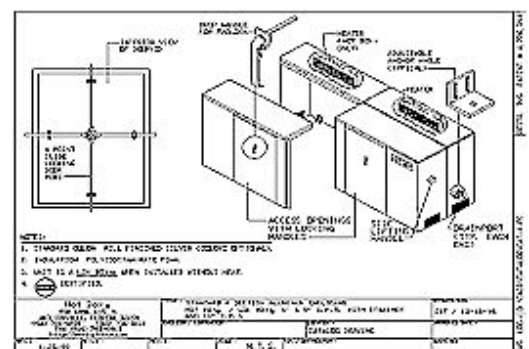


**ALUMINUM - Hot Box®**

Due to weight concerns with fiberglass, our largest enclosures are constructed with 18 ga., mill-finished aluminum in multiple sections. Sections fit together with overlapping "tongue and groove" joints, which are secured internally with mechanical fasteners. Insulation is spray-applied polyisocyanurate foam (structural unicellular insulation) – 1 ½" thick to provide a minimum R value of 8. All insulated HOT BOX® products are designed to protect to -30 F when installed with heat.

- Strategically placed access panels provide easy access for operations, maintenance, and testing of enclosed equipment without the removal of the assembly.
- Access panels are secured using a four (4) pronged interior latch with a padlock through the handle.
- Anchoring is completely internal for vandalism concerns and adjustable for mounting on uneven surfaces.
- Custom enclosures are no problem – our design team is ready to tackle your most demanding enclosure projects.

**Under Construction****Spraying the Polyisocyanurate****Standard 2-pc Aluminum Enclosure****Standard 4-pc Aluminum Enclosure**

HOT BOX® • Aluminum Enclosures • ASSE 1060 Certified

Unit No.	No. Sections	Heat	Dimensions	Pad Size	Ship Wt.
HB4N	2	2000W	90"L x 32"W x 50.5"H	102 X 44	370lbs.
HB4NS	2	2000W	102"L x 32"W x 50.5"H	114 x 44	400lbs.
HB4E	2	2000W	90"L x 32"W x 57.5"H	102 x 44	400lbs.
HB4ES	2	2000W	102"L x 32"W x 57.5"H	114 x 44	450lbs.
HB4000AN	2	1000W	53"L x 33"W x 44"H	65 x 45	275lbs.
HB4000AE	2	1000W	53"L x 44"W x 44"H	65 x 56	300lbs.
HB6N	2	2000W	105"L x 36"W x 53"H	117 x 48	450lbs.
HB6NS	4	3000W	125"L x 36"W x 53"H	137 x 48	475lbs.
HB6E	2	3000W	105"L x 36"W x 64"H	117 x 48	500lbs.
HB6ES	4	3000W	125"L x 36"W x 64"H	137 x 48	525lbs.
HB6000AN	2	1500W	62"L x 39"W x 46"H	74 x 51	325lbs.
HB6000AE	2	1500W	62"L x 53"W x 46"H	74 x 65	375lbs.
HB8N	2	3000W	118"L x 40"W x 58"H	130 x 52	540lbs.
HB8NS	4	3000W	142"L x 40"W x 58"H	154 x 52	550lbs.
HB8E	2	3000W	118"L x 40"W x 74"H	130 x 52	575lbs.
HB8ES	4	4000W	142"L x 40"W x 74"H	154 x 52	610lbs.
HB10N	4	3000W	142"L x 42"W x 65"H	154 x 54	600lbs.
HB10NS	4	4000W	172"L x 42"W x 65"H	184 x 54	675lbs.

HB10E	4	4000W	142"L x 42"W x 65"H	154 x 54	700lbs.
HB10ES	4	4000W	172"L x 42"W x 85"H	184 x 54	775lbs.

HOT BOX ® "THE ENGINEERED ENCLOSURE"®

250 Lane Ave. N., Jacksonville, Florida 32254-2815

[Questions/Comments/Suggestions about this site?](#)

[Contact the Website Administrator.](#)

Phone (904) 786-0204 - Toll Free (800) 736-0238

Fax (904) 783-6965

US Patent Nos. 33,523 & DES 412,366

MEMBERS OF: AWWA, ABPA, ASPE, ASSE, AFSA, NFSA & USC FOUNDATION

All contents ©2000 Hot Box, Inc. - All rights reserved.