

Tag:
Series : 6600

METAL*AIRE®


Submittal No: 6600-22-73(74)

Adjustable Linear Slot Diffuser - Extruded Aluminum
Pattern Controller / Damper
Slots: 1/2" (6650), 3/4" (6675) and 1" (6610)

Models: 6600-22-73 Concealed Spline/Plaster Frame - 3/4" Border with Concealed Mounting
6600-22-74 Wall Mounted Concealed Spline/Plaster Frame - 3/4" Border with Concealed Mounting




☐ Model: 6600-22-73(3/4" Border Concealed Spline /Plaster Frame- with Concealed Mounting)

☐ Model: 6600-22-74(3/4" Border Concealed Spline /Plaster Frame and Wall Frame- with Concealed Mounting)

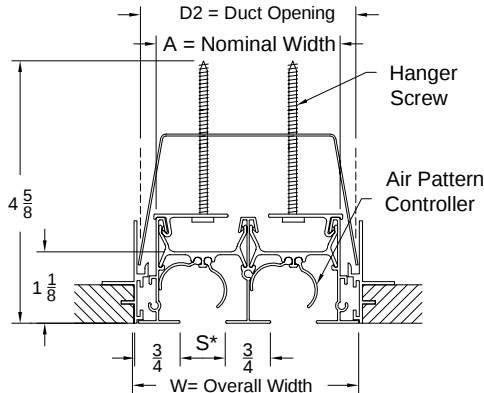

(6600-22-73(74) Model - End Border)

☐ Option: End Border

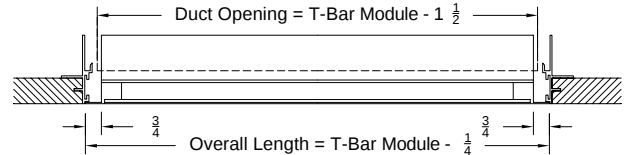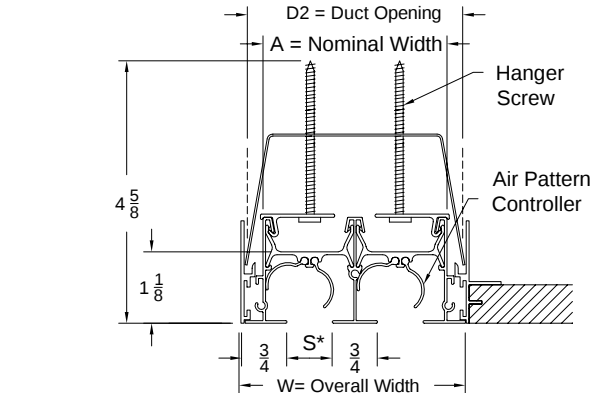


* For Slot Sizes Available See Table Below

Model 6650									
S=1/2"	No. of Air Slots								
Slot	1	2	3	4	5	6	7	8	
A	1 1/4	2 1/2	3 3/4	5	6 5/16	7 1/2	8 3/4	10	
D1	1 5/8	2 7/8	4 1/8	5 3/8	6 5/8	7 7/8	9 1/8	10 3/8	
W	2	3 1/4	4 1/2	5 3/4	7	8 1/4	9 1/2	10 3/4	

Model 6675									
S=3/4"	No. of Air Slots								
Slot	1	2	3	4	5	6	7	8	
A	1 1/2	3	4 1/2	6	7 1/2	9	10 1/2	12	
D1	1 7/8	3 3/8	4 7/8	6 3/8	7 7/8	9 3/8	10 7/8	12 3/8	
W	2 1/4	3 3/4	5 1/4	6 3/4	8 1/4	9 3/4	11 1/4	12 3/4	

Model 6610									
S=1"	No. of Air Slots								
Slot	1	2	3	4	5	6	7	8	
A	1 3/4	3 1/2	5 1/4	7	8 3/4	10 1/2	12 1/4	14	
D1	2 1/8	3 7/8	5 5/8	7 3/8	9 1/8	10 7/8	12 5/8	14 3/8	
W	2 1/2	4 1/4	6	7 3/4	9 1/2	11 1/4	13	14 3/4	

Air Deflection Patterns



1. Available Finishes	2. Available Accessories	3. Construction Details
Standard Finish: ☐ 20 White frame with black pattern controller. Optional Finishes (additional charge): ☐ 21 Clear anodized with black pattern controller	☐ Mitered Corners (45°, 90° and 135°) ☐ Replacement End Caps. ☐ Insulated Boot Plenums. ☐ Non-Insulated Boot Plenums. Note: BP Boot Plenums are shipped separate for field installation.	• Sizes available in only 1-8 slots. • Slot widths available 1/2" (6650), 3/4"(6675) and 1"(6610). • Longest single section is 8 feet. • Continuous lengths are made in sections.

Notes: (☐ check if provided)

Dimensions are in inches