

Tag:
Series : 6600



METAL*AIRE®
Submittal No: 6600-7

Adjustable Linear Slot Diffuser - Extruded Aluminum
Pattern Controller / Damper
Slots: 1/2" (6650), 3/4" (6675) and 1" (6610)

Models: 6600-40-7 Concealed Spline - 25/32" Border - No Hardware
6600-42-7 Concealed Spline - 25/32" Border - With Hardware



☐ **Model: 6600-40-7 (Concealed Spline - No Hardware)**

☐ **Model: 6600-42-7 (Concealed Spline
- With Concealed Mounting Hardware)**

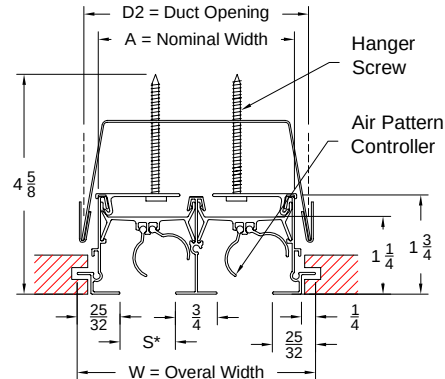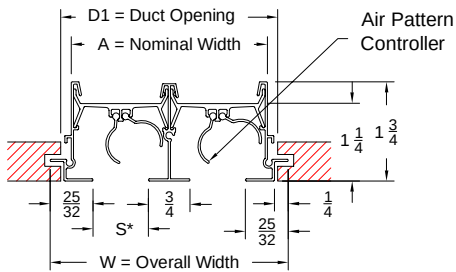

Side View (6600-40-7 & 6600-42-7 - End Border)

☐ **End Border**

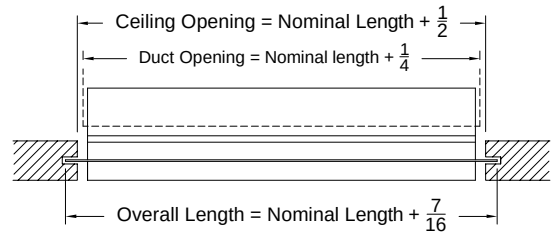


* For Slot Sizes Available See Tables

Model 6650 (6650-40-7 & 6650-42-7)									
S=1/2" Slot	No. of Air Slots								
A	1 1/4	2 1/2	3 3/4	5	6 1/4	7 1/2	8 3/4	10	
D1	1 5/8	2 7/8	4 1/8	5 3/8	6 5/8	7 7/8	9 1/8	10 3/8	
D2	1 7/8	3 1/8	4 3/8	5 5/8	6 7/8	8 1/8	9 3/8	10 5/8	
W	2 1/16	3 5/16	4 9/16	5 13/16	6 1/16	7 1/16	8 5/16	9 9/16	10 13/16

Model 6675 (6675-40-7 & 6675-42-7)									
S=3/4" Slot	No. of Air Slots								
A	1 1/2	3	4 1/2	6	7 1/2	9	10 1/2	12	
D1	1 7/8	3 3/8	4 7/8	6 3/8	7 7/8	9 3/8	10 7/8	12 3/8	
D2	2 1/8	3 5/8	5 1/8	6 5/8	8 1/8	9 5/8	11 1/8	12 5/8	
W	2 5/16	3 13/16	5 5/16	6 13/16	8 5/16	9 13/16	11 5/16	12 13/16	

Model 6610 (6610-40-7 & 6610-42-7)									
S=1" Slot	No. of Air Slots								
A	1 3/4	3 1/2	5 1/4	7	8 3/4	10 1/2	12 1/4	14	
D1	2 1/8	3 7/8	5 5/8	7 3/8	9 1/8	10 7/8	12 5/8	14 3/8	
D2	2 3/8	4 1/8	5 7/8	7 5/8	9 3/8	11 1/8	12 7/8	14 5/8	
W	2 9/16	4 5/16	6 1/16	7 13/16	9 9/16	11 5/16	13 1/16	14 13/16	

Air Deflection Patterns



1. Available Finishes

- Standard Finish:**
☐ 20 White frame with black pattern controller.
Optional Finishes (additional charge):
☐ 21 Clear anodized with black pattern controller

2. Available Accessories

- ☐ Mitered Corners (45°, 90° and 135°)
☐ Replacement End Caps.
☐ Insulated Boot Plenums.
☐ Non-Insulated Boot Plenums.
Note: BP Boot Plenums are shipped separate for field installation.

3. Construction Details

- Sizes available in only 1-8 slots.
- Slot widths available 1/2" (6650), 3/4"(6675) and 1"(6610).
- Longest single section is 8 feet.
- Continuous lengths are made in sections.

Notes: (☐ check if provided)

Dimensions are in inches

Cad File Number: 6600-40(42)-7

Date: 03/25/2003

Submittal No. 6600-7

Page: 1 of 1