


Tag:
Series : **PHP**

METAL*AIRE®
Submittal No: **PHP-FC**

Supply / Return Plenum Slot Diffusers
Steel - Fineline Ceilings

Models: **PHPS (I) -75-9** Supply - Non Insulated (I - Insulated) - 3/4" Slot Width - Center Tee
PHPS (I) -10-9 Supply - Non Insulated (I - Insulated) - 1" Slot Width - Center Tee
PHPS (I) -15-9 Supply - Non Insulated (I - Insulated) - 1 1/2" Slot Width - Center Tee
PHNS (I) -75-9 Supply - Non Insulated (I - Insulated) - 3/4" Slot Width - Hat Section
PHNS (I) -10-9 Supply - Non Insulated (I - Insulated) - 1" Slot Width - Hat Section
PHNS (I) -15-9 Supply - Non Insulated (I - Insulated) - 1 1/2" Slot Width - Hat Section
Adjustable Pattern Controller on all Supply units.

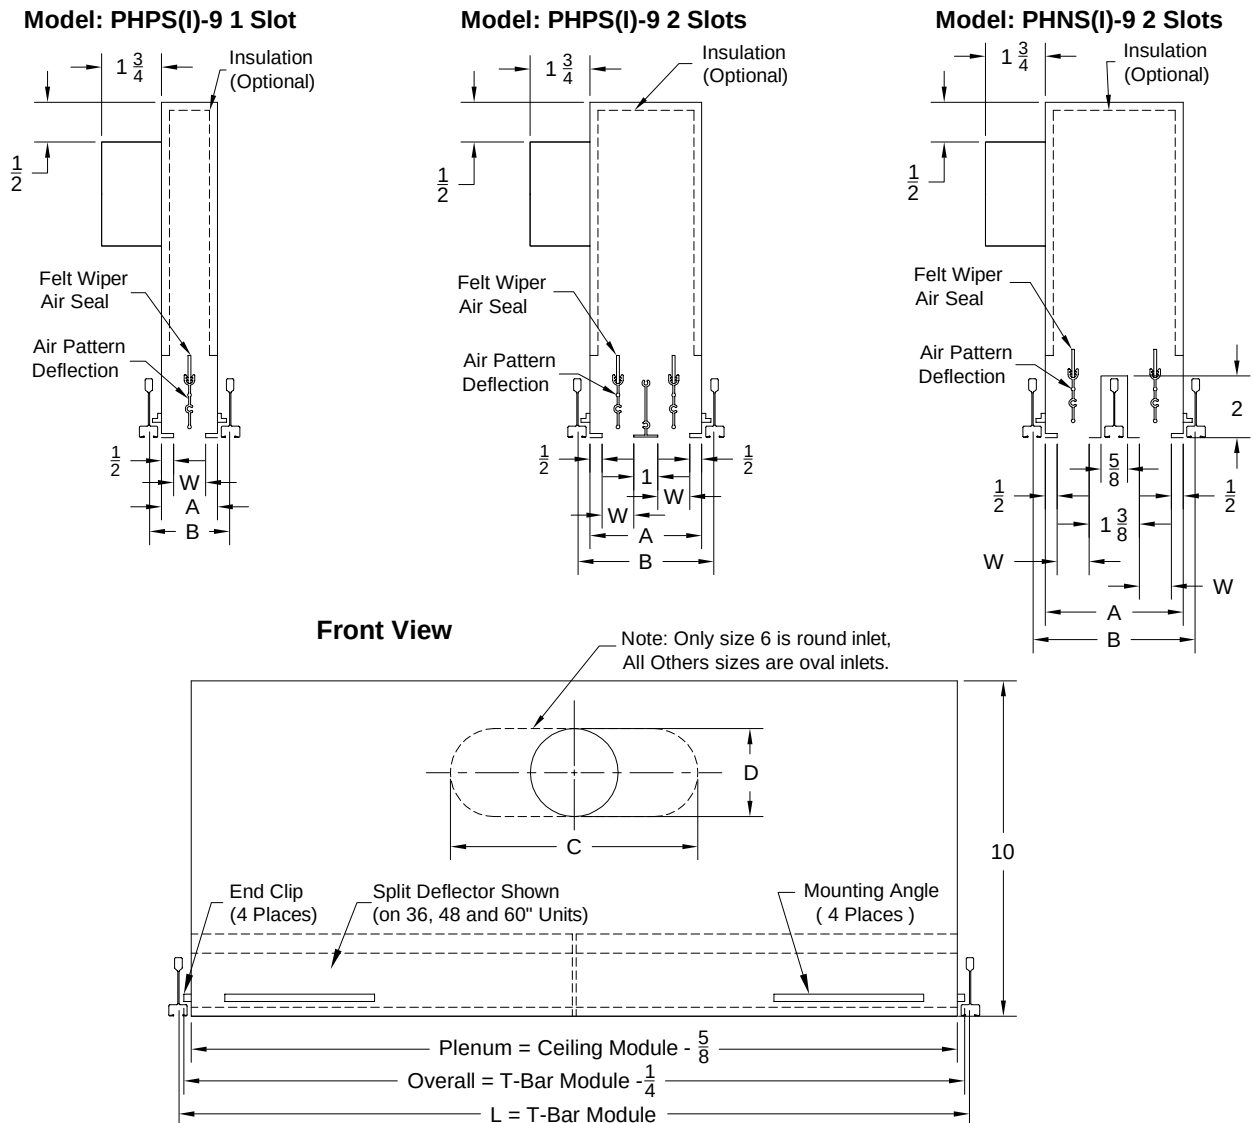

MODELS		L	W	1 Slot with Center Tee		2 Slots with Center Tee		2 Slots with Hat Section	
Supply	Return			A	B	A	B	A	B
PHPS(I)-75-9	PHPR(I)-75-9	24, 48	3/4	1 3/4	2 3/8	3 1/2	4 1/8	-	-
PHPS(I)-10-9	PHPR(I)-10-9	24, 48	1	2	2 5/8	4	4 5/8	-	-
PHPS(I)-15-9	PHPR(I)-15-9	24, 48	1 1/2	2 1/2	3 1/8	5	5 5/8	-	-
PHNS(I)-75-9	PHNR(I)-75-9	24, 48	-	-	-	-	-	3 7/8	4 1/4
PHNS(I)-10-9	PHNR(I)-10-9	24, 48	-	-	-	-	-	4 3/8	5
PHNS(I)-15-9	PHNR(I)-15-9	24, 48	-	-	-	-	-	5 3/8	6

Inlet Size	C	D
6 Round	-	5 7/8
8 Oval	8 15/16	6
10 Oval	12 1/16	6
12 Oval	15 1/4	6

Dimensions are in inches


Tag:
Series : PHP

METAL*AIRE®
Submittal No: PHP-FC


Supply / Return Plenum Slot Diffusers
Steel - Fineline Ceilings

Models: **PHPR (I) -75-9** Return - Non Insulated (I - Insulated) - 3/4" Slot Width - Center Tee
PHPR (I) -10-9 Return - Non Insulated (I - Insulated) - 1" Slot Width - Center Tee
PHPR (I) -15-9 Return - Non Insulated (I - Insulated) - 1 1/2" Slot Width - Center Tee
PHNR (I) -75-9 Return - Non Insulated (I - Insulated) - 3/4" Slot Width - Hat Section
PHNR (I) -10-9 Return - Non Insulated (I - Insulated) - 1" Slot Width - Hat Section
PHNR (I) -15-9 Return - Non Insulated (I - Insulated) - 1 1/2" Slot Width - Hat Section
No Pattern Controller on Return Units


Model: PHPR-9 1 Slot



Model: PHPR-9 2 Slots

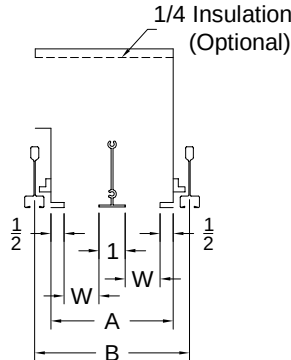


Model: PHNR-9 2 Slots

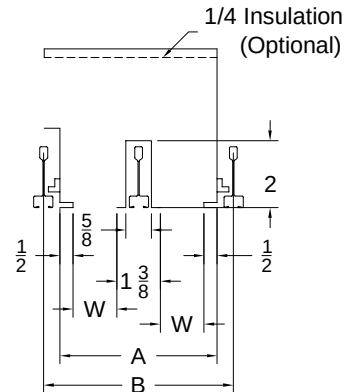

For Dimensions A, B, L & W See Table on Page 1

Front View

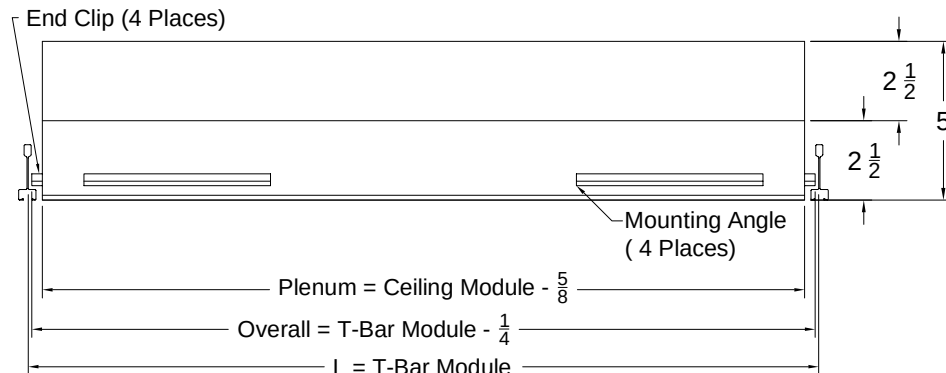

Notes: (☐ check if provided)

1. Available Finishes	2. Available Accessories	4. Construction Details
Standard Finish: ☐ 25 - WT - White Tees. Optional Finish (additional charge): ☐ 26 - White Tees & Borders. ☐ 27 - Black Tees & Borders.	☐ HS Center Hat Section for 2 Slot units (see PHNS Models). ☐ LQ Locking Quadrant Damper.	• Extruded Aluminum Pattern Controller on Supply units, no Pattern Controller on Return units. • One - piece electrogalvanized steel plenum with double hem face. • Units over 24" have a standard cross-notch. • Internal Insulation is 1/4" on one slot units. • Available in lengths and slot widths as shown.

Dimensions are in inches